S3115

Version 1.00

Copyright
Copyright © MiTAC Computer Corporation, 2009. All rights reserved. No part of this manual may be reproduced or translated without prior written consent from MiTAC Computer Corp.

Trademark
All registered and unregistered trademarks and company names contained in this manual are property of their respective owners including, but not limited to the following.

TYAN® is a trademark of MiTAC Computer Corporation.
Intel® is a trademark of Intel® Corporation.
AMI®, AMIBIOS® and combinations thereof are trademarks of AMI Technologies.
Microsoft®, Windows® are trademarks of Microsoft Corporation.
Winbond® is a trademark of Winbond Electronics Corporation.

Notice
Information contained in this document is furnished by MiTAC Computer Corporation and has been reviewed for accuracy and reliability prior to printing. MiTAC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TYAN® products including liability or warranties relating to fitness for a particular purpose or merchantability. MiTAC retains the right to make changes to product descriptions and/or specifications at any time, without notice. In no event will MiTAC be held liable for any direct or indirect, incidental or consequential damage, loss of use, loss of data or other malady resulting from errors or inaccuracies of information contained in this document.

Contents

Before you begin… 4

Chapter 1: Instruction 5

1.1 - Congratulations 5
1.2 - Hardware Specifications 5
1.3 - Software Specifications 11
1.4 - AST2050 User Guide 11

Chapter 2: Board Installation 13

2.1 - Board Image 14
2.2 - Block Diagram 15
2.3 - Board Parts, Jumpers and Connectors 16
2.4 - Tips on Installing Motherboard in Chassis 22
2.5 - Installing the Memory 24
2.6 - Attaching Drive Cables 26
2.7 - Installing Add-In Cards 27
2.8 - Connecting External Devices 28
2.9 - Installing the Power Supply 29
2.10 - Finishing Up 30

Chapter 3: BIOS Setup 31

3.1 - About the BIOS 31
3.2 - BIOS Menu Bar 31
3.3 - Setup Basics 32
3.4 - Getting Help 32
3.5 - In Case of Problems 32
3.6 - BIOS Main Menu 33
3.7 - BIOS Advanced Menu 34
3.8 - PCI PnP Menu 50
3.9 - Boot Menu 52
3.10 - Security Menu 55
3.11 - Chipset Menu 56
3.12 - Exit Menu 59

Chapter 4: Diagnostics 61

4.1 - Flash Utility 61
4.2 - AMIBIOS Post Code 62

Appendix: How to Make a Driver Diskette 65

Glossary 67

Technical Support 73

Before you begin…

Check the box contents!

The retail motherboard package should contain the following:

	1x S3115 Motherboard
	**2 x SATA Cable**
	1 x S3115 User's manual
	1 x S3115 Quick reference guide
	1 x TYAN® Driver CD
	1 x I/O shield

Chapter 1: Instruction

1.1 - Congratulations

Congratulations in purchasing the TYAN® S3115 motherboard. This Intel 945GC express chipset utilizes the latest Intel Atom 330 CPU to create a highly cost affective product. This product can be used for social networking, voice over IP and numerous other online activities.

TYAN® S3115 is designed around several different configurations which are all detailed in the following Hardware Specification section:

1.2 - Hardware Specifications

TYAN S3115 (S3115GM2N)

Processor	Supported CPU Series		Intel Atom Processor 330 (1MB Cache, 1.60GHz, 533MHz FSB)
	Socket Type / QTY		Micro-FCBGA8 / (1)
	Thermal Design Power (TDP) wattage		8W
	System Bus		533 MHz
Chipset	MCH / ICH		Intel 945GC / ICH7
Memory	Supported DIMM Qty		(2) DIMM slots
	DIMM Type / Speed		Unbuffered DDR2 SO-DIMM 533 / 400
	Capacity		Up to 2GB
	Memory channel		2 Channels per CPU
	Memory voltage		1.8V
Expansion Slots	PCI-E		(1) PCI-E x1 slot
	PCI		(1) PCI 32-bit slot
LAN	Port QTY		(2)
	Controller		Intel 82574L
Storage	SATA	Connector	(4) SATA
		Controller	ICH7
		Speed	3.0 Gb/s
Graphic	Connector type		D-Sub 15-pin
	Resolution		1600x1200@60Hz
	Chipset		Aspeed AST2050
	Video RAM		8MB
Input /Output	USB		(4) USB 2.0 ports (2 at rear, 2 via cable)
	COM		(1) port
	VGA		(1) D-Sub 15-pin VGA port
Input /Output	RJ-45		(2) GbE ports

	Power	ATX 2x10 pin connector
	Front Panel	(1) 2x12-pin SSI front panel header
	PSMI	(1) 1x5-pin header
	SATA	(3) SATA-II vertical and (1) right angle SATA-II connectors
System Monitoring	**Chipset**	Winbond W83627DHG-P
	Voltage	Monitors voltage for CPU, memory, chipset and power supply
	Fan	Total (3) 4-pin headers
	Temperature	Monitors temperature for CPU and system environment
Server Management	**Onboard Chipset**	Onboard Aspeed AST2050
	AST2050 IPMI Feature	IPMI 2.0 compliant baseboard management controller (BMC) / Supports storage over IP and remote platform-flash/ USB 2.0 virtual hub
	AST2050 iKVM Feature	24-bit high quality video compression / Dual 10/100 Mb/s MAC interfaces
BIOS	**Brand / ROM size**	AMI / 2MB
	Feature	Plug and Play (PnP) /PCI2.3 /WfM2.0 /SMBIOS2.3 /PXE boot / ACPI 2.0 power management /Power on mode after power recovery / User-configurable H/W monitoring / Auto-configurable of hard disk types / Multiple boot options
Form Factor	**Form Factor**	mini-ITX
	Board Dimension	6.57" x 6.69" (167mm x 170mm)
Operating System	**OS supported list**	Please refer to our OS supported list.
Regulation	**FCC (DoC)**	Class B
	CE (DoC)	Yes
Operating Environment	**Operating Temp.**	10° C ~ 35° C (50° F~ 95° F)
	Non-operating Temp.	- 40° C ~ 70° C (-40° F ~ 158° F)
	In/Non-operating Humidity	90%, non-condensing at 35° C
RoHS	**RoHS 6/6 Complaint**	Yes
Package Contains (Retail)	**Motherboard**	(1) S3115 Motherboard
	Manual	(1) User's manual / (1) Quick Ref. Guide
	Installation CD	(1) TYAN installation CD
	I/O Shield	(1) I/O Shield
	Cable SATA	(2) SATA signal cables

TYAN S3115 (S3115GM2N-B)

Processor	**Supported CPU Series**		Intel Atom Processor 330 (1MB Cache, 1.60GHz, 533MHz FSB)
	Socket Type / QTY		Micro-FCBGA8 / (1)
	Thermal Design Power (TDP) wattage		8W
	System Bus		533 MHz
Chipset	**MCH / ICH**		Intel 945GC / ICH7
Memory	**Supported DIMM QTY**		(2) DIMM slots
	DIMM Type / Speed		Unbuffered DDR2 SO-DIMM 533 / 400
	Capacity		Up to 2GB
	Memory channel		2 Channels per CPU
	Memory voltage		1.8V
Expansion Slots	**PCI**		(1) PCI 32-bit slot
LAN	**Port QTY**		(2)
	Controller		Intel 82574L
Storage	**SATA**	**Connector**	(2) SATA
		Controller	ICH7
		Speed	3.0 Gb/s
Graphic	**Connector type**		D-Sub 15-pin
	Resolution		1600x1200@60Hz
	Chipset		Aspeed AST2050
	Video RAM		8MB
Input /Output	**USB**		(2) USB 2.0 ports (at rear)
	COM		(1) port
	VGA		(1) D-Sub 15-pin VGA port
	RJ-45		(2) GbE ports
	Power		ATX 2x10 pin connector
	PSMI		(1) 1x5-pin header
	SATA		(2) SATA-II vertical connectors
System Monitoring	**Chipset**		Winbond W83627DHG-P
	Voltage		Monitors voltage for CPU, memory, chipset and power supply
	Temperature		Monitors temperature for CPU and system environment
Server Management	**Onboard Chipset**		Onboard Aspeed AST2050
	AST2050 IPMI Feature		IPMI 2.0 compliant baseboard management controller (BMC) / Supports storage over IP and remote platform-flash/USB 2.0 virtual hub
	AST2050 iKVM Feature		24-bit high quality video compression / Dual 10/100 Mb/s MAC interfaces
BIOS	**Brand / ROM size**		AMI / 2MB

BIOS	**Feature**	Plug and Play (PnP) /PCI2.3 /WfM2.0 /SMBIOS2.3 /PXE boot / ACPI 2.0 power management /Power on mode after power recovery / User-configurable H/W monitoring / Auto-configurable of hard disk types / Multiple boot options
Form Factor	**Form Factor**	mini-ITX
	Board Dimension	6.57" x 6.69" (167mm x 170mm)
Operating System	**OS supported list**	Please refer to our OS supported list.
Regulation	**FCC (DoC)**	Class B
	CE (DoC)	Yes
Operating Environment	**Operating Temp.**	10° C ~ 35° C (50° F~ 95° F)
	Non-operating Temp.	- 40° C ~ 70° C (-40° F ~ 158° F)
	In/Non-operating Humidity	90%, non-condensing at 35° C
RoHS	**RoHS 6/6 Complaint**	Yes
Package Contains (Bulk Pack)	**Motherboard**	(10) S3115 Motherboard
	Manual	(1) User's manual / (1) Quick Ref. Guide
	Installation CD	(1) TYAN installation CD

TYAN S3115 (S3115GMN)

Processor	**Supported CPU Series**		Intel Atom Processor 330 (1MB Cache, 1.60GHz, 533MHz FSB)
	Socket Type / QTY		Micro-FCBGA8 / (1)
	Thermal Design Power (TDP) wattage		8W
	System Bus		533 MHz
Chipset	**MCH / ICH**		Intel 945GC / ICH7
Memory	**Supported DIMM Qty**		(2) DIMM slots
	DIMM Type / Speed		Unbuffered DDR2 SO-DIMM 533 / 400
	Capacity		Up to 2GB
	Memory channel		2 Channels per CPU
	Memory voltage		1.8V
Expansion Slots	**PCI-E**		(1) PCI-E x1 slot
	PCI		(1) PCI 32-bit slot
LAN	**Port QTY**		(1)
	Controller		Intel 82574L
Storage	**SATA**	**Connector**	(4) SATA
		Controller	ICH7
		Speed	3.0 Gb/s
Graphic	**Connector type**		D-Sub 15-pin
	Resolution		1600x1200@60Hz

Graphic	**Chipset**	Aspeed AST2050
	Video RAM	8MB
Input /Output	**USB**	(4) USB 2.0 ports (2 at rear, 2 via cable)
	COM	(1) port
	VGA	(1) D-Sub 15-pin VGA port
	RJ-45	(1) GbE port
	Power	ATX 2x10 pin connector
	Front Panel	(1) 2x12-pin SSI front panel header
	PSMI	(1) 1x5-pin header
	SATA	(3) SATA-II vertical and (1) right angle SATA-II connectors
System Monitoring	**Chipset**	Winbond W83627DHG-P
	Voltage	Monitors voltage for CPU, memory, chipset and power supply
	Fan	Total (3) 4-pin headers
	Temperature	Monitors temperature for CPU and system environment
Server Management	**Onboard Chipset**	Onboard Aspeed AST2050
	AST2050 IPMI Feature	IPMI 2.0 compliant baseboard management controller (BMC) / Supports storage over IP and remote platform-flash / USB 2.0 virtual hub
	AST2050 iKVM Feature	24-bit high quality video compression / Dual 10/100 Mb/s MAC interfaces
BIOS	**Brand / ROM size**	AMI / 2MB
	Feature	Plug and Play (PnP) /PCI2.3 /WfM2.0 /SMBIOS2.3 /PXE boot / ACPI 2.0 power management /Power on mode after power recovery / User-configurable H/W monitoring / Auto-configurable of hard disk types / Multiple boot options
Form Factor	**Form Factor**	mini-ITX
	Board Dimension	6.57" x 6.69" (167mm x 170mm)
Operating System	**OS supported list**	Please refer to our OS supported list.
Regulation	**FCC (DoC)**	Class B
	CE (DoC)	Yes
Operating Environment	**Operating Temp.**	10° C ~ 35° C (50° F~ 95° F)
	Non-operating Temp.	- 40° C ~ 70° C (-40° F ~ 158° F)
	In/Non-operating Humidity	90%, non-condensing at 35° C
RoHS	**RoHS 6/6 Complaint**	Yes
Package Contains (Retail)	**Motherboard**	(1) S3115 Motherboard
	Manual	(1) User's manual / (1) Quick Ref. Guide
	Installation CD	(1) TYAN installation CD
	I/O Shield	(1) I/O Shield
	Cable SATA	(2) SATA signal cables

TYAN S3115 (S3115GN)

Processor	**Supported CPU Series**		Intel Atom Processor 330 (1MB Cache, 1.60GHz, 533MHz FSB)
	Socket Type / QTY		Micro-FCBGA8 / (1)
	Thermal Design Power (TDP) wattage		8W
	System Bus		533 MHz
Chipset	**MCH / ICH**		Intel 945GC / ICH7
Memory	**Supported DIMM Qty**		(2) DIMM slots
	DIMM Type / Speed		Unbuffered DDR2 SO-DIMM 533 / 400
	Capacity		Up to 2GB
	Memory channel		2 Channels per CPU
	Memory voltage		1.8V
Expansion Slots	**PCI-E**		(1) PCI-E x1 slot
	PCI		(1) PCI 32-bit slot
LAN	**Port QTY**		(1)
	Controller		Intel 82574L
Storage	**SATA**	**Connector**	(4) SATA
		Controller	ICH7
		Speed	3.0 Gb/s
Graphic	**Connector type**		D-Sub 15-pin
	Resolution		1600x1200@60Hz
	Chipset		945GC integrated graphics
	Video RAM		1MB/8MB (select in BIOS)
Input /Output	**USB**		(4) USB 2.0 ports (2 at rear, 2 via cable)
	COM		(1) port
	VGA		(1) D-Sub 15-pin VGA port
	RJ-45		(1) GbE port
	Power		ATX 2x10 pin connector
	Front Panel		(1) 2x12-pin SSI front panel header
	PSMI		(1) 1x5-pin header
	SATA		(3) SATA-II vertical and (1) right angle SATA-II connectors
System Monitoring	**Chipset**		Winbond W83627DHG-P
	Voltage		Monitors voltage for CPU, memory, chipset and power supply
	Fan		Total (3) 4-pin headers
	Temperature		Monitors temperature for CPU and system environment
BIOS	**Brand / ROM size**		AMI / 2MB

BIOS	**Feature**	Plug and Play (PnP) /PCI2.3 /WfM2.0 /SMBIOS2.3 /PXE boot / ACPI 2.0 power management /Power on mode after power recovery / User-configurable H/W monitoring / Auto-configurable of hard disk types / Multiple boot options
Form Factor	**Form Factor**	mini-ITX
	Board Dimension	6.57" x 6.69" (167mm x 170mm)
Operating System	**OS supported list**	Please refer to our OS supported list.
Regulation	**FCC (DoC)**	Class B
	CE (DoC)	Yes
Operating Environment	**Operating Temp.**	10° C ~ 35° C (50° F~ 95° F)
	Non-operating Temp.	- 40° C ~ 70° C (-40° F ~ 158° F)
	In/Non-operating Humidity	90%, non-condensing at 35° C
RoHS	**RoHS 6/6 Complaint**	Yes
Package Contains (Retail)	**Motherboard**	(1) S3115 Motherboard
	Manual	(1) User's manual / (1) Quick Ref. Guide
	Installation CD	(1) TYAN installation CD
	I/O Shield	(1) I/O Shield
	Cable SATA	(2) SATA signal cables

Remember to visit TYAN® website at http://www.tyan.com there you can find information on all of TYAN® s products with FAQs, online manuals and BIOS upgrades and more.

1.3 - Software Specifications

For OS (operation system) support, please check the TYAN® website for the latest information.

1.4 - AST2050 User Guide

Remember to visit the TYAN® website at http://www.tyan.com for the AST2050 user guide.

Chapter 2: Board Installation

You are now ready to install your motherboard.

How to install our products right… the first time

The first thing you should do is reading this user's manual. It contains important information that will make configuration and setup much easier. Here are some precautions you should take when installing your motherboard:

(1) Ground yourself properly before removing your motherboard from the antistatic bag. Unplug the power from your computer power supply and then touch a safely grounded object to release static charge (i.e. power supply case). For the safest conditions, TYAN® recommends wearing a static safety wrist strap.
(2) Hold the motherboard by its edges and do not touch the bottom of the board, or flex the board in any way.
(3) Avoid touching the motherboard components, IC chips, connectors, memory modules, and leads.
(4) Place the motherboard on a grounded antistatic surface or on the antistatic bag that the board was shipped in.
(5) Inspect the board for damage.

The following pages include details on how to install your motherboard into your chassis, as well as installing the processor, memory, disk drives and cables.

Note:

DO NOT APPLY POWER TO THE BOARD IF IT HAS BEEN DAMAGED.

2.1 - Board Image

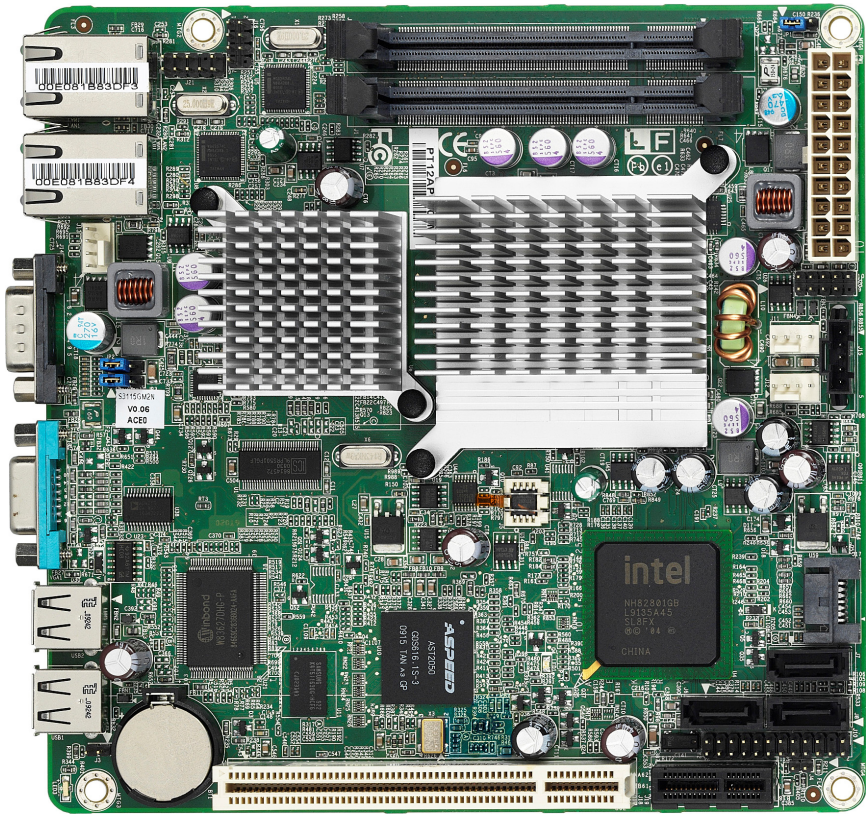

This diagram is representative of the latest motherboard revision available at the time of publishing. The board you receive may not look exactly like the above diagram.

2.2 - Block Diagram

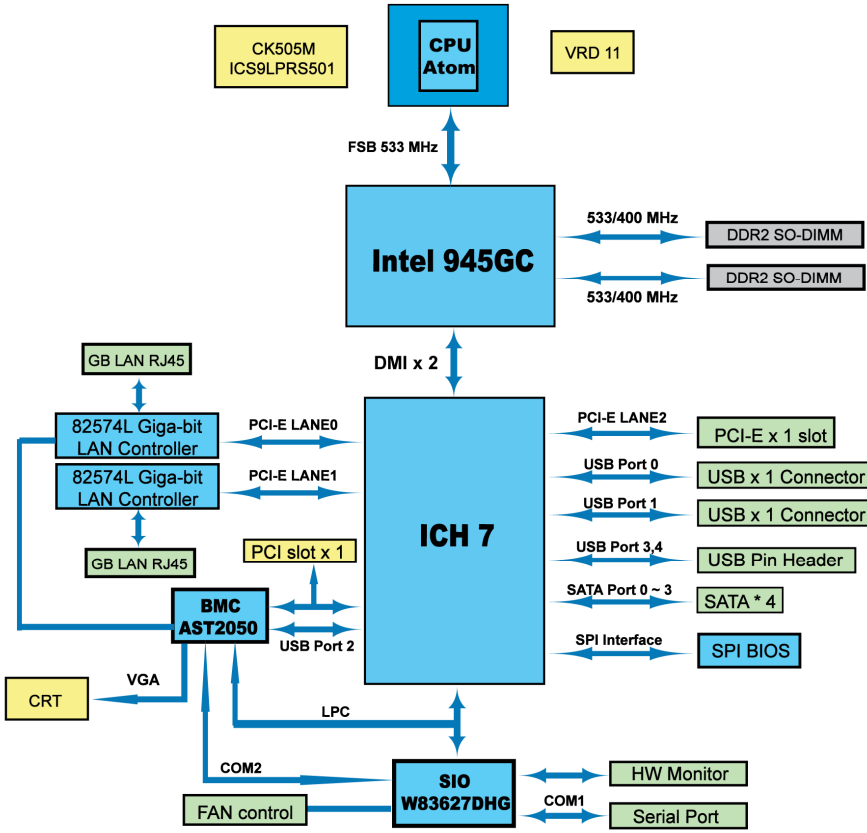

S3115 Block Diagram

2.3 - Board Parts, Jumpers and Connectors

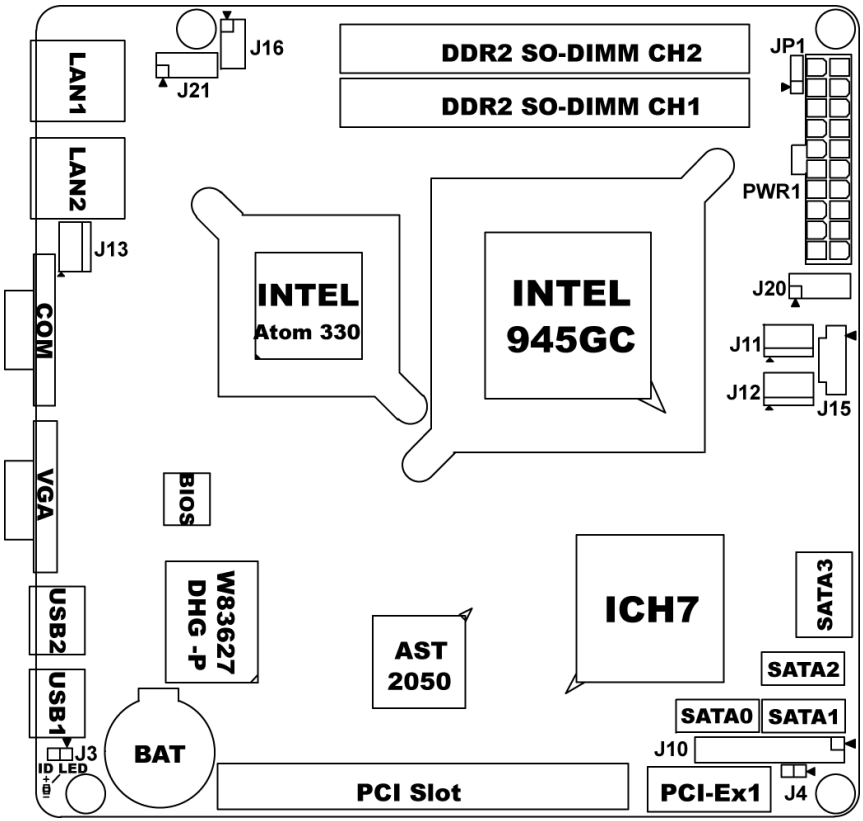

This diagram is representative of the latest board revision (S3115GM2N) available at the time of publishing. The board you receive may not look exactly like the above diagram.

Jumpers and Connectors

Jumper/Connector	Function
J11/J12/J13	FAN Connector
J3	BMC Reset Header
J4	HDD LED header
J10	Front Panel
J15	PSMI Header
J16	Rear Panel I/O
J20	USB Pin Header
J21	BMC Pin Header
JP1	Clear CMOS

Jumper Legend

	OPEN - Jumper OFF	Without jumper cover
	CLOSED - Jumper ON	With jumper cover

Jumper Placement

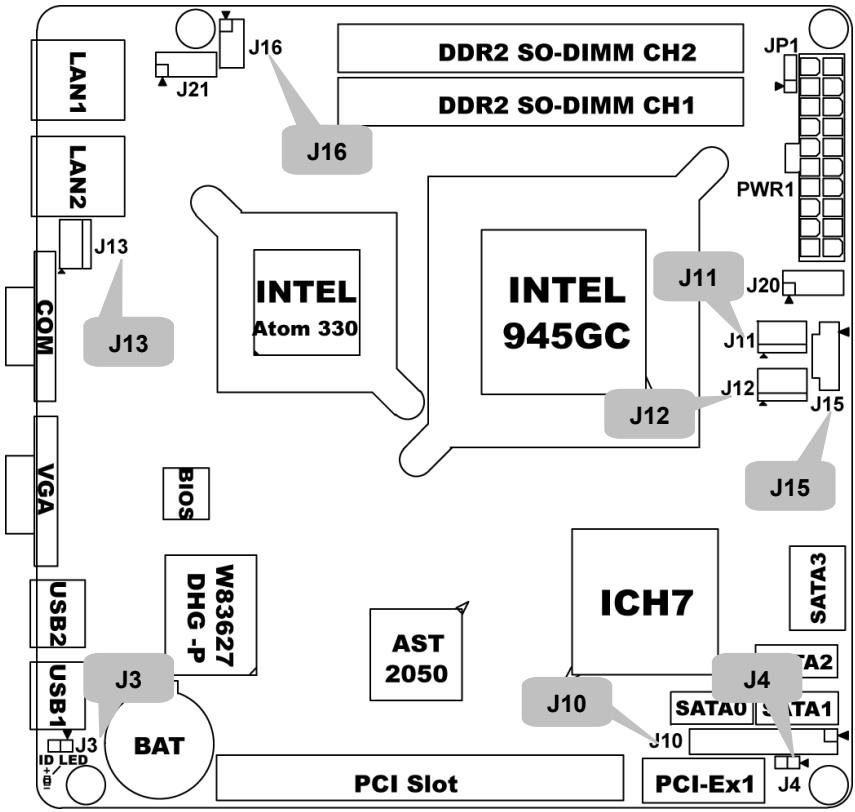

J11/J12/J13: Fan Connector



Pin	1	2	3	4
Signal	GND	+12V	TACH	PWM

Note: *These fan headers are keyed to accept both 3-pin and 4-pin fans. If you use only a 3-pin fan, some fan options will not be available.*

J3: BMC Reset Pin Header



Pin	1	2
Signal	BMC_DIS_L	GND

J4: HDD LED Pin Header



Pin	1	2
Signal	FP1_HDLED_P	FP1_HDLED_N

J10: Front Panel Header



Signal	Pin	Pin	Signal
PWRLED+	1	2	PWR
KEY	3	4	IDLED+
PWRLED	5	6	IDLED
HDDLED+	7	8	FAULTLED1
HDDLED	9	10	FAULTLED2
PWRBTN	11	12	LAN1LED+
GND	13	14	LAN1LED
RESET	15	16	SMBUSDATA
GND	17	18	SMBUSCLK
IDBTN	19	20	CASEOPEN
NC	21	22	LAN2LED+
NMIBTN	23	24	LAN2LED

NOTE: 1: +3.3VSB power rail is IDLED, WLED (Warning LED), LANLED
2: +5VSB power rail is PWRLED
3: +3.3V power rail is HDLED

J15: PSMI Pin Header

Pin	1	2	3	4	5
Signal	BMC_PSMI_CLK	BMC_PSMI_DAT	PSU_SMBALERT_N	GND	NC

J16: Rear Panel I/O Header



Signal	Pin	Pin	Signal
PWRSW	1	2	GND
RSTSW	3	4	GND
PWRLED	5	6	PWRLED+
NC	7	8	KEY

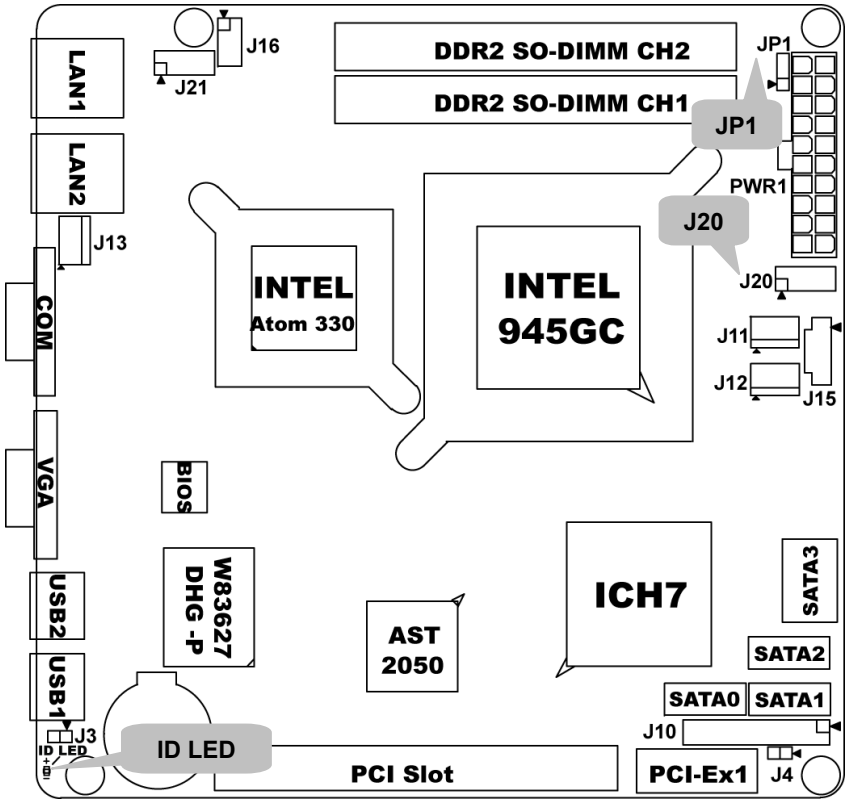

J20: USB Pin Header

Signal	Pin	Pin	Signal
V5_USB_FP0	1	2	V5_USB_FP0
USB_C4_FB	3	4	USB_C3_FB
USB_T4_FB	5	6	USB_T3_FB
GND	7	8	GND
KEY	9	10	GND

JP1: Clear CMOS

 Normal (Default)	You can reset the CMOS settings by using this jumper if you have forgotten your system/setup password or need to clear system BIOS setting. - Power off system and **disconnect both power connectors from the motherboard** - Put jumper cap back to Pin_1 and Pin_2 (default setting) - Use jumper cap to close Pin_2 and Pin_3 for several seconds to Clear CMOS Reconnect power and power on system
 Clear CMOS	

Onboard ID LED

You can identify the specific system using this LED. Users from remote site could also activate ID LED by input a few commands in IPMI, detailed software support please visit http://www.tyan.com for lastest AST2050 user guide.



Pin	Signal	
+	P3V3_AUX	
-	SYS_ID_SW_N	
State	**Color**	**Description**
On	Blue	System identified
Off	Off	System not identified

2.4 - Installing the Motherboard into a Chassis

Before installing your motherboard, make sure your chassis has the necessary motherboard support studs installed. These studs are usually metal and are gold in color. Usually, the chassis manufacturer will pre-install the support studs. If you are unsure of stud placement, simply lay the motherboard inside the chassis and align the screw holes of the motherboard to the studs inside the case. If there are any studs missing, you will know right away since the motherboard will not be able to be securely installed.

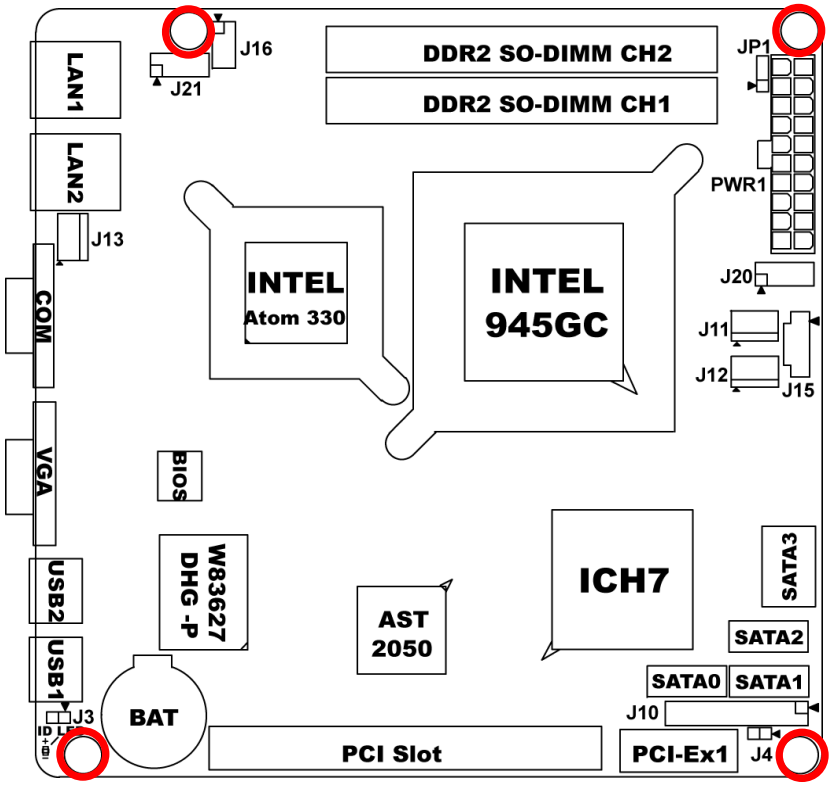

Some chassis' include plastic studs instead of metal. Although the plastic studs are usable, TYAN® recommends using metal studs with screws that will fasten the motherboard more securely in place.

Below is a chart detailing what the most common motherboard studs look like and how they should be installed.

Mounting the Motherboard

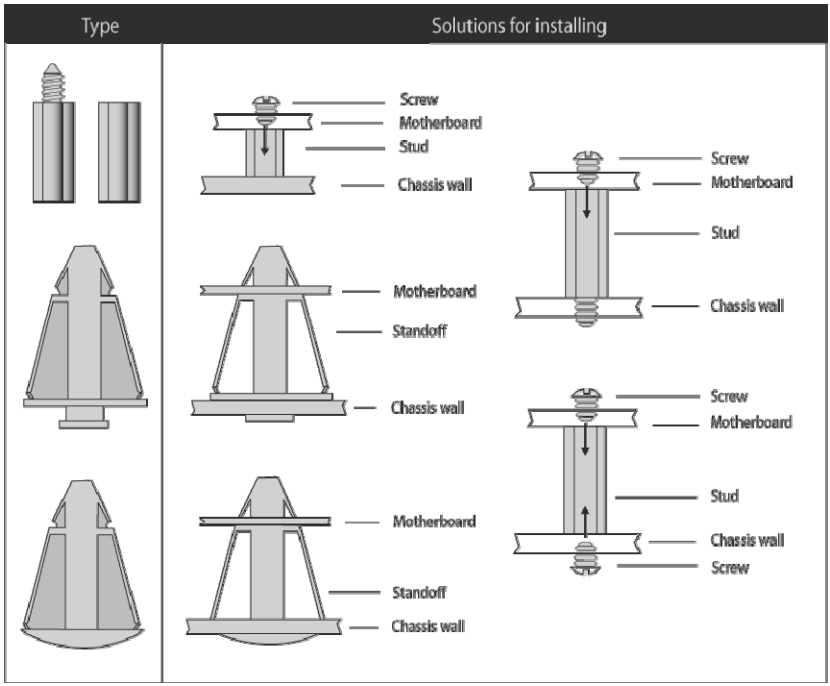

2.5 - Installing the Memory

Before installing memory, be sure that the memory you have is compatible with the motherboard and processor. Check the TYAN® web site at: www.tyan.com for details of the type of memory recommended for your motherboard.
The following diagram shows common type of DDR2 SO-DIMM memory module.

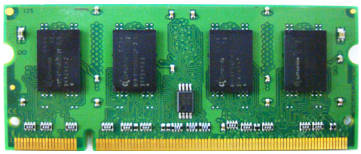

- The TYAN® S3115 supports up to 2GB of unbuffered DDR2 SO-DIMM 400/533 MHz memory.
- All installed memory will automatically be detected and no jumpers or settings need changing.

Note:

Install a single SO-DIMM module into Channel 1.

Memory Installation Procedure

Follow these instructions to install memory modules into the S3115.

1. Press the locking levers in the direction shown in the following illustration.

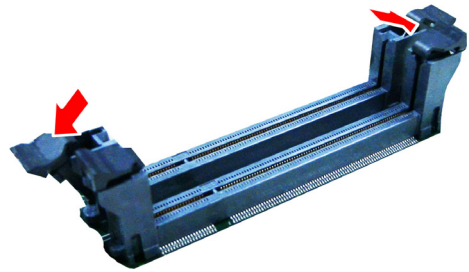

2. Align the memory module with the socket. The memory module is keyed to fit only one way in the socket.

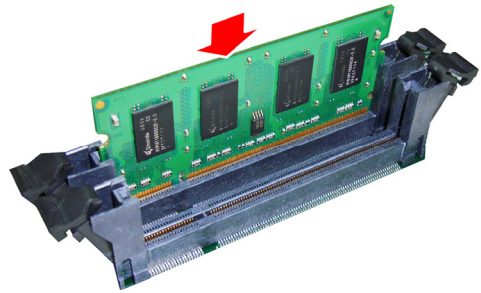

3. Seat the module firmly into the socket by gently pressing down until it sits flush with the socket. The locking levers pop up into place.

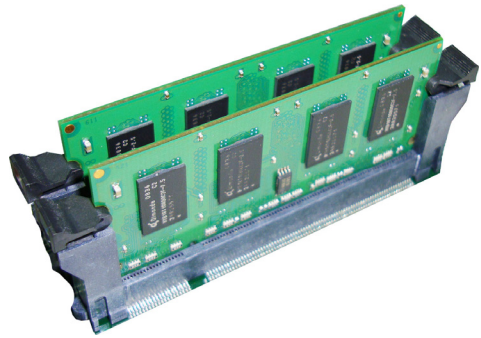

2.6 - Attaching Drive Cables

Attaching Serial ATA Cables
S3115 is equipped with **4** Serial ATA (SATA) channels. Connections for the drives are very simple.
There is no need to set Master/Slave jumpers on SATA drives.
If you are in need of SATA cables or power adapters please contact your place of purchase.

The following pictures illustrate how to connect an SATA drive

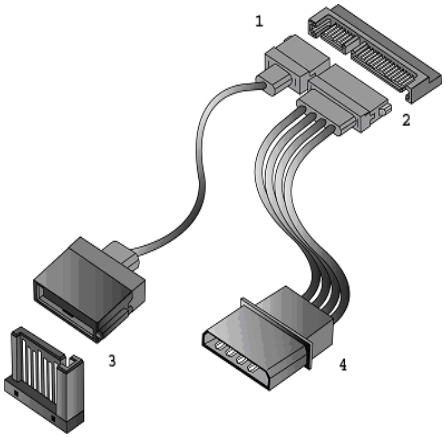

1. SATA drive cable connection

2. SATA drive power connection

3. SATA cable motherboard connector

4. SATA drive power adapter

2.7 - Installing Add-In Cards

Before installing add-in cards, it's helpful to know if they are fully compatible with your motherboard. For this reason, we've provided the diagrams below, showing the slots that may appear on your motherboard.

PCI-E x 1 slot



PCI 32bit slot



Simply find the appropriate slot for your add-in card and insert the card firmly. Do not force any add-in cards into any slots if they do not seat in place. It is better to try another slot or return the faulty card rather than damaging both the motherboard and the add-in card.

TIP: It's good practice to install add-in cards in a staggered manner rather than making them directly adjacent to each other. Doing so allows air to circulate within the chassis more easily, thus improving cooling for all installed devices.

Note:

YOU MUST ALWAYS unplug the power connector to the motherboard before performing system hardware changes to avoid damaging the board or expansion device.

2.8 - Connecting External Devices

Your motherboard supports a number of different interfaces through connecting peripherals. See the following diagrams for the details.

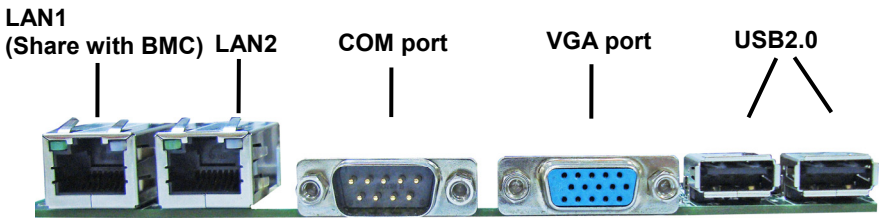

Note:

Peripheral devices can be plugged straight into any of these ports but software may be required to complete the installation.

Onboard LAN LED Color Definition

The two onboard Ethernet ports have green and yellow LEDs to indicate LAN status. The chart below illustrates the different LED states.

10/100/1000 Mbps LAN Link/Activity LED Scheme			
		Left LED	**Right LED**
10 Mbps	**Link**	Green	Off
	Active	Blinking Green	Off
100 Mbps	**Link**	Green	Green
	Active	Blinking Green	Green
1000 Mbps	**Link**	Green	Yellow
	Active	Blinking Green	Yellow
No Link		Off	Off

2.9 - Installing the Power Supply

TYAN® S3115 supports VRM11.0 ATX V2.x revisions (2x10 pin) power supply.

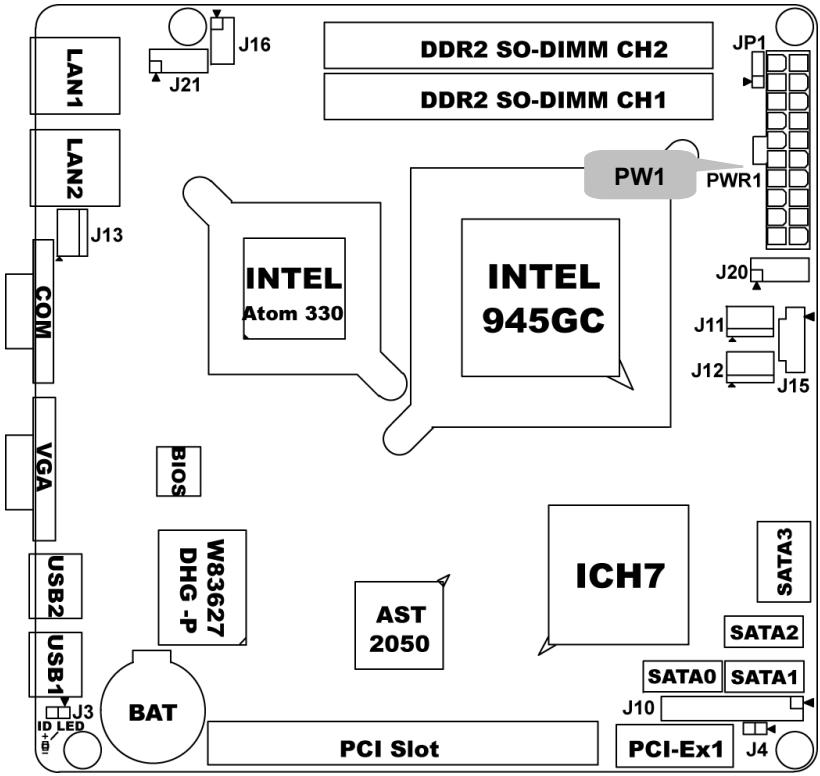

PW 1: 20-Pin ATX PWR main Connector

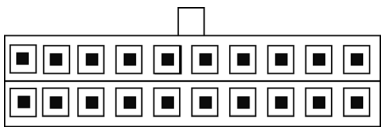

Signal	Pin	Pin	Signal
+3.3V	1	11	+3.3V
+3.3V	2	12	-12V
GND	3	13	GND
+5V	4	14	PS_ON
GND	5	15	GND
+5V	6	16	GND
GND	7	17	GND
PWRGD	8	18	-5V
5VSB	9	19	+5V
+12V	10	20	+5V

We suggest using a standard ATX 2x10 pin 120W or higher power supply, this is of course depends on how many devices you attach. 120W is sufficient for common system (i.e. 4 hard drives, 1 expansion card) configuration. However, a higher wattage solution may be needed if the system is fully loaded.
Please refer to www.tyan.com website for further information.

Note:

YOU MUST unplug the power supply before plugging the power cables to motherboard connectors.

2.10 - Finishing Up

Congratulations on making it this far! You're finished setting up the hardware aspects of your computer. Before closing up your chassis, make sure that all cables and wires are connected properly, especially IDE cables and most importantly, jumpers. You may have difficulty powering on your system if the motherboard jumpers are not set correctly. In the rare circumstance that you have experienced difficulty, you can find help by asking your vendor for assistance. If they are not available for assistance, please find setup information and documentation online at our website or by **calling your vendor's support line.**

Chapter 3: BIOS Setup

3.1 - About the BIOS

The BIOS is the basic input/output system, the firmware on the motherboard that enables your hardware to interface with your software. The BIOS determines what a computer can do without accessing programs from a disk. The BIOS contains all the code required to control the keyboard, display screen, disk drives, serial communications, and a number of miscellaneous functions. This chapter describes the various BIOS settings that can be used to configure your system.

The BIOS section of this manual is subject to change without notice and is provided for reference purposes only. The settings and configurations of the BIOS are current at the time of print and are subject to change, and therefore may not match exactly what is displayed on screen.

This section describes the BIOS setup program. The setup program lets you modify basic configuration settings. The settings are then stored in a dedicated, battery-backed memory (called NVRAM) that retains the information even when the power is turned off.

To start the BIOS setup utility:

1. Turn on or reboot your system.
2. Press <Del> during POST (<Tab> on remote console) to start the BIOS setup utility.

3.2 - BIOS Menu Bar

The menu bar at the top of the windows lists these selections:

Main	To configure basic system setups
Advanced	To configure the advanced chipset features
PCI/PnP	To configure legacy Plug and Play or PCI settings
Boot	To configure system boot order
Security	To configure user and supervisor passwords
Chipset	To configure chipset management features
Exit	To exit setup utility

3.3 - Setup Basics

The table below shows how to navigate in the setup program using the keyboard.

Key	Function
<F1>	General help window
<ESC>	Exit current menu
← → arrow keys	Select a different menu
↑ or ↓ arrow keys	Move cursor up/down
<Tab> / <Shift-Tab>	Cycle cursor up/down
<Home> / <End>	Move cursor to top/bottom of the window
<PgUp> / <PgDn>	Move cursor to next/previous page
<->	Select the previous value/setting of the field
<+>	Select the next value/setting of the field
<F8>	Load Fail Safe default configuration values of the menu
<F9>	Load the Optimal default configuration values of the menu
<F10>	Save and exit
<Enter>	Execute command or select submenu

3.4 - Getting Help

Pressing [**F1**] will display a small help window that describes the appropriate keys to use and the possible selections for the highlighted item. To exit the Help Window, press [**ESC**].

3.5 - In Case of Problems

If you have trouble booting your computer after making and saving the changes with the BIOS setup program, you can restart the computer by holding the power button down until the computer shuts off (usually within 4 seconds); resetting by pressing CTRL-ALT-DEL; or clearing the CMOS. The best advice is to only alter settings that you thoroughly understand. In particular, do not change settings in the Chipset section unless you are absolutely sure of what you are doing. The Chipset defaults have been carefully chosen either by TYAN® or your system manufacturer for best performance and reliability. Even a seemingly small change to the Chipset setup options may cause the system to become unstable or unusable.

Note:

The following pages provide the details of BIOS menu. Please be noticed that the BIOS menu are continually changing due to the BIOS updating. The BIOS menu provided are the most updated when this manual is written. Please visit TYAN®'s website at http://www.tyan.com **for the information of BIOS update.**

3.6 - BIOS Main Menu

The Main BIOS Menu is the first screen that you can navigate. The Main BIOS setup menu screen has two main frames. The left frame displays all the options that can be configured. "Grayed-out" options cannot be configured, options in blue can be changed.

The right frame displays the key legend. Above the key legend is an area reserved for a text message. When an option is selected in the left frame, it is highlighted in white. Often, a text message will accompany it.

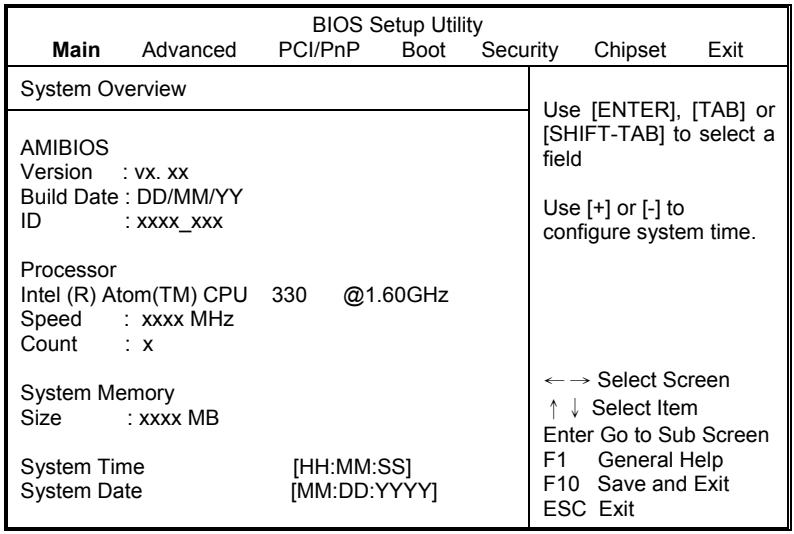

Feature	Option	Description
Main		
System Time	HH : MM : SS	Set the system time
System Date	MM : DD : YYYY	Set the system date

3.7 - BIOS Advanced Menu

You can select any of the items in the left frame of the screen, such as Super I/O Configuration, to go to the sub menu for that item. You can display an Advanced BIOS Setup option by highlighting it using the <Arrow> keys. All Advanced BIOS Setup options are described in this section. The Advanced BIOS Setup screen is shown below. The sub menus are described on the following pages.

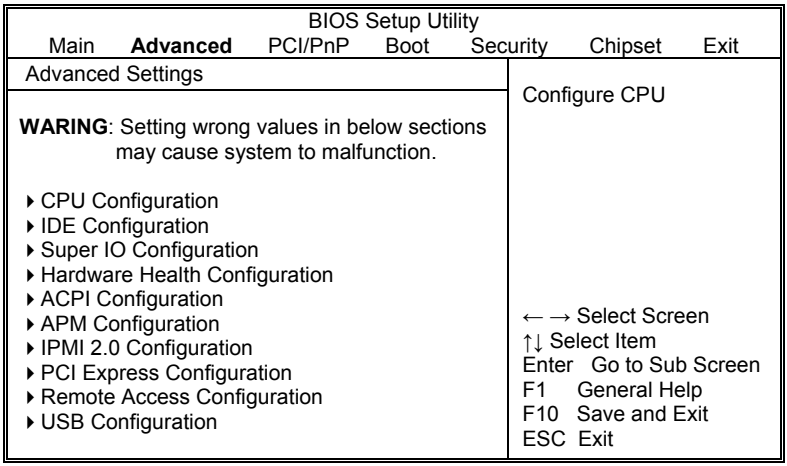

Feature	Option	Description
Advanced Settings		
CPU Configuration	Menu Item	Configure CPU
IDE Configuration	Menu Item	Configure the IDE device(s)
Super IO Configuration	Menu Item	Configures Super IO Chipset Win627DHG
Hardware Health Configuration	Menu Item	Configure/Monitor the Hardware Health
ACPI Configuration	Menu Item	Section for Advanced ACPI Configuration
APM Configuration	Menu Item	Configuration Advanced Power Management
IPMI 2.0 Configuration	Menu Item	IPMI configuration including server monitoring and event log
PCI Express Configuration	Menu Item	Configure PCI Express Support
Remote Access Configuration	Menu Item	Configure Remote Access
USB Configuration	Menu Item	Configure the USB support

3.7.1 - CPU Configuration

You can use this screen to view CPU Configuration Menu. Use the up and down arrow (↑/↓) keys to select an item. Use the Plus and Minus (+/-) keys to change the value of the selected option. The settings are described on the following pages.

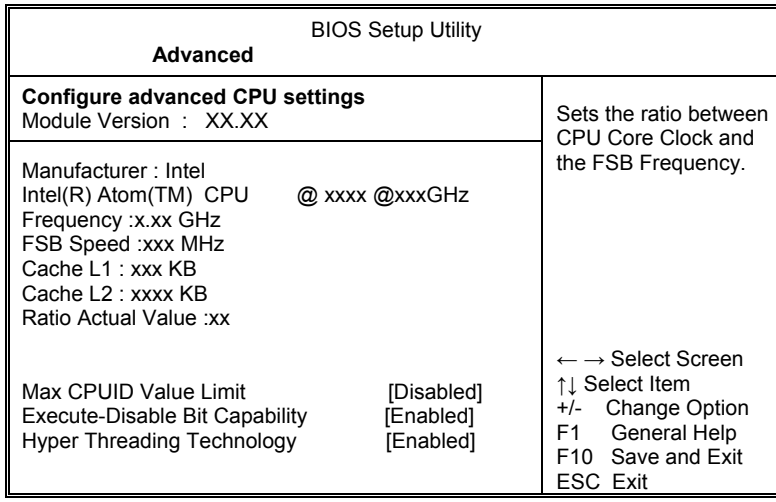
BIOS Setup Utility
Advanced
Configure advanced CPU settings
Module Version : XX.XX
Manufacturer : Intel
Intel(R) Atom(TM) CPU @ xxxx @xxxGHz
Frequency :x.xx GHz
FSB Speed :xxx MHz
Cache L1 : xxx KB
Cache L2 : xxxx KB
Ratio Actual Value :xx
Max CPUID Value Limit [Disabled]
Execute-Disable Bit Capability [Enabled]
Hyper Threading Technology [Enabled]
Sets the ratio between CPU Core Clock and the FSB Frequency.
← → Select Screen
↑↓ Select Item
+/- Change Option
F1 General Help
F10 Save and Exit
ESC Exit

Feature	Option	Description
CPU Configuration		
Manufacturer	Read only	Displays information about CPU
Frequency		
FSB Speed		
Cache L1		
Cache L2		
Ratio Status		
Ratio Actual Value		
Max CPUID Value Limit	Enabled	Disabled for Windows XP
	Disabled	
Execute-Disable Bit Capability	**Enabled**	When disabled, force the XD feature flag to always return 0.
	Disabled	
Intel (R) HT Technology	**Enabled**	When 'Disabled' only one thread per enabled core is enabled.
	Disabled	

3.7.2 - IDE Configuration Sub-Menu

You can use this screen to select options for the IDE Configuration Settings. Use the up and down <Arrow> Keys to select an item. Use the <Plus> and <Minus> Keys to change the value of the selection options.

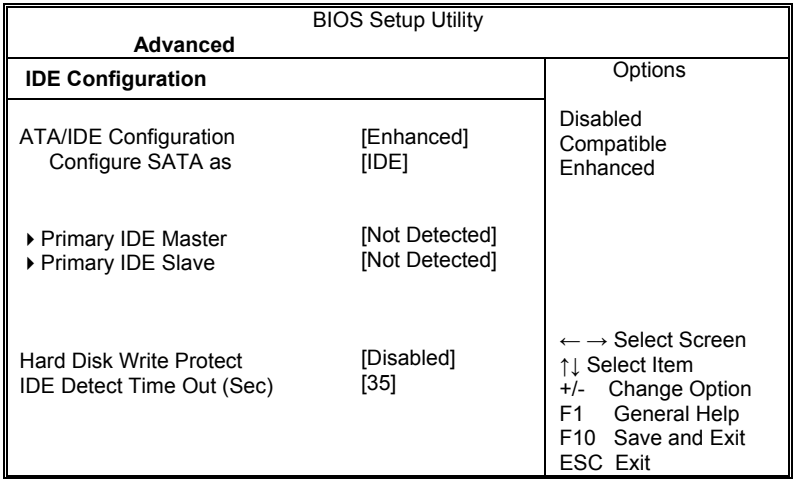

Feature	Option	Description
IDE Configuration		
ATA Configuration	**Enhanced**	Configure SATA devices
	Disabled	
	Compatible	
Configure SATA as	**IDE**	Configure SATA as IDE
Hard Disk Write Protect	**Disabled**	Enable/Disable device write protection. This will be effective only if device is accessed through BIOS.
	Enabled	
IDE Detect Time Out (Sec)	**0~35** (at 5 interval)	Select the time out value for detecting ATA/ATAPI device(s).

3.7.2.1 - Primary IDE Master/Slave Configuration Sub-Menu

BIOS Setup Utility **Advanced**		
Primary IDE Master		Select the type of device connected to the system. ← → Select Screen ↑↓ Select Item +/- Change Option F1 General Help F10 Save and Exit ESC Exit
Device: Not Detected		
TYPE	[Auto]	
LBA/Large Mode	[Auto]	
Block (Multi-Sector Transfer)	[Auto]	
PIO Mode	[Auto]	
DMA Mode	[Auto]	
S.M.A.R.T.	[Auto]	
32Bit Data Transfer	[Disabled]	

BIOS Setup Utility **Advanced**		
Primary IDE Slave		Select the type of device connected to the system. ← → Select Screen ↑↓ Select Item +/- Change Option F1 General Help F10 Save and Exit ESC Exit
Device: Not Detected		
TYPE	[Auto]	
LBA/Large Mode	[Auto]	
Block (Multi-Sector Transfer)	[Auto]	
PIO Mode	[Auto]	
DMA Mode	[Auto]	
S.M.A.R.T.	[Auto]	
32Bit Data Transfer	[Disabled]	

Feature	Option	Description
Primary IDE Master/Slave		
Type	**Auto**	Selects the type of device connected to the system.
	Not Installed	
	CD/DVD	
	ARMD	
LBA/Large Mode	**Auto**	Auto: Enabled LBA Mode if the device supports it and the device is not already formatted with LBA Mode disabled. Disabled: Disabled LBA Mode.
	Disabled	

Feature	Option	Description
Block (Multi-Sector Transfer)	**Auto**	Disabled: The Data transfer from and to the device occurs one sector at a time. Auto: The Data transfer from and to the device occurs multiple sectors at a time if the device supports it.
	Disabled	
PIO Mode	**Auto**	Select the PIO Mode. Select Auto to enhance hard disk performance by optimizing the hard disk timing.
	0~4(at 1 interval)	
DMA Mode	**Auto**	Select DMA Mode. Auto: Auto detected.
S.M.A.R.T.	**Auto**	S.M.A.R.T (Self-Monitoring Analysis and Reporting Technology) is a utility that monitors your disk status to predict hard disk failure.
	Disabled	
	Enabled	
32Bit Data Transfer	Enabled	Enable 32-bit to maximize the IDE hard disk data transfer rate.
	Disabled	

3.7.3 - Super I/O Configuration Sub- Menu

You can use this screen to select options for the Super I/O settings. Use the up and down arrow (/) keys to select an item. Use the Plus and Minus (+/-) keys to change the value of the selected option.

BIOS Setup Utility

Advanced

Configure Win627DHG Super IO Chipset		Allows BIOS to Select Serial Port1 Base Addresses.
Serial Port1 Address	[3F8/IRQ4]	
Serial Port2 Address	[2F8/IRQ3]	
Serial Port2 Mode	[Normal]	
Watchdog timer	[Disabled]	
		← → Select Screen ↑↓ Select Item +/- Change Option F1 General Help F10 Save and Exit ESC Exit

Feature	Option	Description
Configure Win627 Super I/O Chipset		
Serial Port1 Address	**3F8 IRQ4**	Allow BIOS to select Serial Port1 Base Addresses.
	3E8 IRQ4	
	2E8 IRQ3	
	Disabled	
Serial Port1 Address	3F8 IRQ4	Allow BIOS to select Serial Port2 Base Addresses.
	3E8 IRQ4	
	2E8 IRQ3	
	2F8 IRQ3	
	Disabled	
Serial Port2 Mode	**Normal**	Allows BIOS to select mode for serial port 2.
	IrDA	
	ASK IR	
Watchdog timer	**Disabled**	Set watchdog time value. When watchdog time-out occurs,system will auto reboot.
	1 Minute	
	2 Minutes	
	3 Minutes	
	4 Minutes	

3.7.4 - Hardware Health Configuration Sub-Menu

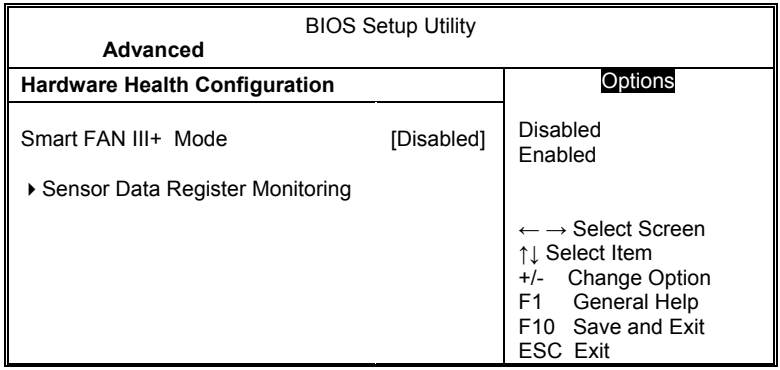

Feature	Option	Description
Configure Hardware Health		
Smart FAN III+ Mode	**Disabled**	\
	Enabled	

3.7.4.1 - Sensor Data Register Monitoring Configuration Sub-Menu

BIOS Setup Utility **Advanced**			
ID# NAME	READING	STATUS	
30 CPU VCORE	: xx V	OK	
31 VCC12VIN	: xx V	OK	
32 AVCC 3.3V	: xx V	OK	
33 VCC3.3	: xx V	OK	
34 VCC DDR	: xx V	OK	
35 SYSCORE 1.1V	: xx V	OK	
36 VCC5VIN	: xx V	OK	
37 SYS TEMP	: xx °C	OK	
38 CPUFAN	: xxxx RPM	Alert	← → Select Screen
39 REARFAN1	: xxxx RPM	OK	↑↓ Select Item
3B REARFAN2	: xxxx RPM	Alert	+/- Change Option
3C CPU THRMDA	: xx °C	OK	F1 General Help
3E 3.3V DUAL	: xx V	OK	F10 Save and Exit
3F VBAT	: xx V	OK	ESC Exit

3.7.5 – ACPI Configuration Sub- Menu

You can use this screen to view the ACPI Configuration Menu. Use the up and down arrow (↑/↓) keys to select an item. Use the Plus and Minus (+/-) keys to change the value of the selected option. The settings are described on the following pages.

BIOS Setup Utility **Advanced**	
ACPI Settings	General ACPI Configuration settings
▸ General ACPI Configuration ▸ Advanced ACPI Configuration ▸ Chipset ACPI Configuration	← → Select Screen ↑↓ Select Item +/- Change Option F1 General Help F10 Save and Exit ESC Exit

3.7.5.1 - General ACPI Configuration Sub- Menu

BIOS Setup Utility **Advanced**		
General ACPI Configuration		Select the ACPI state used for System Suspend. ← → Select Screen ↑↓ Select Item +/- Change Option F1 General Help F10 Save and Exit ESC Exit
Suspend mode	[S1(POS)]	

Feature	Option	Description
General ACPI Configuration		
Suspend mode	S1(DOS)	Select the ACPI state used for System Suspend.
	S3(STR)	
	AUTO	

3.7.5.2 - Advanced ACPI Configuration Sub- Menu

BIOS Setup Utility **Advanced**		
Advanced ACPI Configuration		Enabled RSDP pointers to 64-bit Fixed System Description Tables. DiACPI version has some ← → Select Screen ↑↓ Select Item +/- Change Option F1 General Help F10 Save and Exit ESC Exit
ACPI Version Features	[ACPI v3.0]	
ACPI APIC support	[Enabled]	
AMI OEMB table	[Enabled]	
Headless mode	[Disabled]	

Feature	Option	Description
Advanced ACPI Configuration		
ACPI Version Features	**ACPI v3.0**	Enable RSDP pointers to 64-bit Fixed System Description Tables. Di ACPI version has some.
	ACPI v2.0	
	ACPI v1.0	
ACPI APIC support	**Enabled**	Include ACPI APIC table pointer to RSDT pointer list.
	Disabled	
AMI OEMB table	**Enabled**	Include OEMB table pointer to R(X)SDT pointer lists.
	Disabled	
Headless mode	Enabled	Enable or disable Headless operation mode through ACPI.
	Disabled	

3.7.5.3 - South Bridge ACPI Configuration Sub- Menu

BIOS Setup Utility

Advanced

South Bridge ACPI Configuration		**Option**
Energy Lake Feature	[Disabled]	Enabled Disabled
APIC ACPI SCI IRQ	[Disabled]	
High Performance Event Timer	[Enabled]	
HPET Memory Address	[FED00000h]	← → Select Screen ↑↓ Select Item +/- Change Option F1 General Help F10 Save and Exit ESC Exit

Feature	Option	Description
Chipset ACPI Configuration		
Energy Lake Feature	**Disabled**	Allow you to configure Intel's Energy Lake power management technology. If you are running a Media Center you can install the Intel VIIV software to get the correct driver; otherwise disable the Energy Lake feature in BIOS (it relates purely to Intel's Quick Resume feature, which is generally useless).
	Enabled	
ACPI APIC SCI IRQ	**Disabled**	Enable / Disable ACPI APIC SCI IRQ
	Enabled	
High Performance Event Timer	**Enabled**	Enable/disable High Performance Event Timer.
	Disabled	
HPET Memory Address	**FED00000h**	Choose HPET Memory Address
	FED01000h	
	FED02000h	
	FED03000h	

3.7.6 - APM Configuration Sub-Menu

BIOS Setup Utility **Advanced**		
APM Configuration		Disable/Enable LAN GPI to generate a wake event.
Resume On LAN	[Disabled]	
Resume On PME#	[Disabled]	
Resume On RTC Alarm	[Disabled]	
		← → Select Screen ↑↓ Select Item +/- Change Option Tab Select Field F1 General Help F10 Save and Exit ESC Exit

Feature	Option	Description
APM Configuration		
Resume On LAN	Enabled **Disabled**	Disable/Enable LAN GPI to generate a wake event.
Resume On PME#	Enabled **Disabled**	Disable/Enable PME to generate a wake event.
Resume On RTC Alarm	Enabled **Disabled**	Disable/Enable RTC to generate a wake event.

3.7.7 - IPMI 2.0 Configuration Sub-Menu

You can use this screen to view the IPMI 2.0 Configuration Settings. Use the up and down arrow (↑/↓) keys to select an item. Use the Plus and Minus (+/-) keys to change the value of the selected option. The settings are described on the following pages.

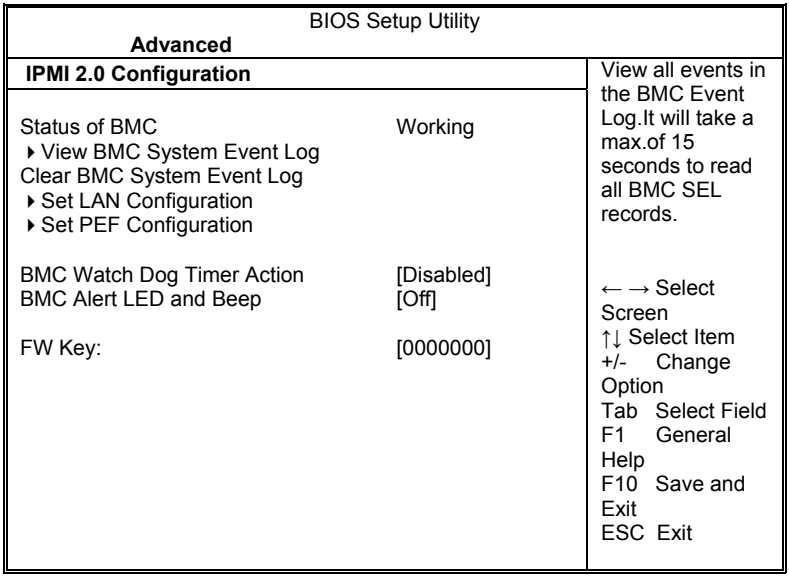

Feature	Option	Description
IPMI 2.0 Configuration		
Status of BMC	Read only	Display BMC status
BMC Watch Dog Timer Action	**Disabled**	Allows the BMC to reset or power down the system if the operating system crashes or hangs.
	Reset System	
	Power Down	
	Power Cycle	
BMC Alert LED and Beep	**Off**	BMC Alert LED and Beep On/Off
	On	
FW Key	/	Enter IPMI FW Key upgrade to IPMI or iKVM function.

3.7.7.1 - View BMC System Event Log Sub-Menu

BIOS Setup Utility **Advanced**		
Total Number of Entries: XXX		Use +/- to traverse the event log.
SEL Entry Number	[x]	
SEL Record ID:	xxxx	
SEL Record Type:	xx(System Event)	
Event Timestamp:	xxxx, xxxx xx:xx:xx	← → Select Screen
Generator ID:	xxxx	↑↓ Select Item
Event Message Format Ver:	xx (IPMI ver 2.0)	+/- Change Option
Event Sensor Type:	xx (xx)	Tab Select Field
Event Sensor Number:	xx	F1 General Help
Event Dir Type:	xx	F10 Save and Exit
Event Data:	xx xx xx	ESC Exit

Please refer to BMC event log.

3.7.7.2 - Set LAN Configuration Sub-Menu

BIOS Setup Utility **Advanced**		
LAN Configuration Status		This group provide setup function for:
Current IP source in BMC:	[DHCP]	
Current IP address in BMC:	xxx.xxx.xxx.xxx	1. IP Address Source
Current Subnet Mask in BMC:	xxx.xxx.xxx.xxx	2. IP Address
Current Gateway Address in BMC:	xxx.xxx.xxx.xxx	3. Subnet Mask
Current MAC address in BMC:	xx.xx.xx.xx.xx.xx	4.Gateway Address
▸ Set LAN Configuration		← → Select Screen
		↑↓ Select Item
		+/- Change Option
		Tab Select Field
		F1 General Help
		F10 Save and Exit
		ESC Exit

Feature	Option	Description
LAN Configuration		
IP Address Source	**DHCP** STATIC	IPMI IP Source STATIC/DHCP
Current IP Address in BMC	Read only	/
Current MAC Address in BMC	Read only	/
Current Subnet Mask in BMC	Read only	/
Gateway Address	Read only	/

BIOS Setup Utility **Advanced**	
Setup LAN Configuration	IPMI IP Address Source STATIC/DHCP
IP Address Source [DHCP] Save LAN Configration	After setup LAN Configure need select Save LAN Configuration and choice [OK] to enabled changes. ← → Select Screen ↑↓ Select Item +/- Change Option Tab Select Field F1 General Help F10 Save and Exit ESC Exit

3.7.7.3 - Set PEF Configuration Sub-Menu

BIOS Setup Utility **Advanced**	
Set PEF Configuration Parameters Command	Enable or Disable PEF Support ← → Select Screen ↑↓ Select Item +/- Change Option Tab Select Field F1 General Help F10 Save and Exit ESC Exit
PEF Support [Enabled] PEF Action Global Control [Alert] Alert Startup Delay [Disabled] Startup Delay [Disabled] Event Message For PEF Action [Disabled]	

Feature	Option	Description
Set PEF Configuration Parameters Command		
PEF Support	Disabled	Enable or Disable PEF Support
	Enabled	
PEF Action Global Control	**Alert**	Select action for PEF action global control.
	Power Down	
	Reset System	
	Power Cycle	
	OEM Action	
	Diagnostic Int.	
Alert Startup Delay	**Disabled**	Enable/Disable alert startup delay.
	Enabled	
Startup Delay	**Disabled**	Enable/Disable Startup delay.
	Enabled	
Event Message For PEF Action	**Disabled**	Enable/Disable event msg for PEF Action
	Enabled	

3.7.8 - PCI Express Configuration Sub-Menu

BIOS Setup Utility **Advanced**	
PCI Express Configuration	Enable/Disable PCI Express L0s and L1 link power status. ← → Select Screen ↑↓ Select Item +/- Change Option F1 General Help F10 Save and Exit ESC Exit
Active State Power-Management [Disabled]	

Feature	Option	Description
PCI Express Configuration		
Active State Power-Management	**Disabled** Enabled	Enables/Disable PCI Express L0s and L1 link power states.

3.7.9 - Remote Access Configuration Sub-Menu

You can use this screen to view the Remote Access Configuration Menu. This feature allows access to the Server remotely via serial port. Use the up and down arrow (↑/↓) keys to select an item. Use the Plus and Minus (+/-) keys to change the value of the selected option. The settings are described on the following pages.

BIOS Setup Utility **Advanced**	
Configure Remote Access type and parameters	Select Remote Access type. ← → Select Screen ↑↓ Select Item +/- Change Option F1 General Help F10 Save and Exit ESC Exit
Remote Access [Disabled]	

Feature	Option	Description
Configure Remote Access type and parameters		
Remote Access	Enabled	Enables remote access to system through serial port.
	Disabled	
NOTE: The items listed below will appear when **Remote Access** is set to [Enabled].		
Serial Port Number	**COM1**	Select COM1 for console redirection and COM2 for serial over LAN.Make sure the selected port is enabled.
	COM2	
Base Address, IRQ	Read only	
Serial Port Mode	115200 8, n, 1	Select Serial Port settings.
	57600 8, n, 1	
	38400 8, n, 1	
	19200 8, n, 1	
	9600 8, n, 1	
Flow Control	**None**	Select Flow Control for console redirection.
	Hardware	
	Software	
Redirection After BIOS POST	Disabled	Disable: Turns off the redirection after POST Boot Loader: Redirection is active during POST and during Boot Loader. Always: Redirection is always active. <Some OSs may not work if set to Always>
	Boot Loader	
	Always	
Terminal Type	**ANSI**	Select the target terminal type.
	VT100	
	VT-UTF8	
VT-UTF8 Combo Key Support	**Enabled**	Enable VT-UTF8 Combination key Support for ANSI/VT100 terminals.
	Disabled	
Sredir Memory Display Delay	**No Delay**	Gives the delay in seconds to display memory information
	Delay 1 Sec	
	Delay 2 Sec	
	Delay 4 Sec	

3.7.10 - USB Configuration Sub- Menu

You can use this screen to view the USB Configuration Menu. Use the up and down arrow (↑/↓) keys to select an item. Use the Plus and Minus (+/-) keys to change the value of the selected option. The settings are described on the following pages.

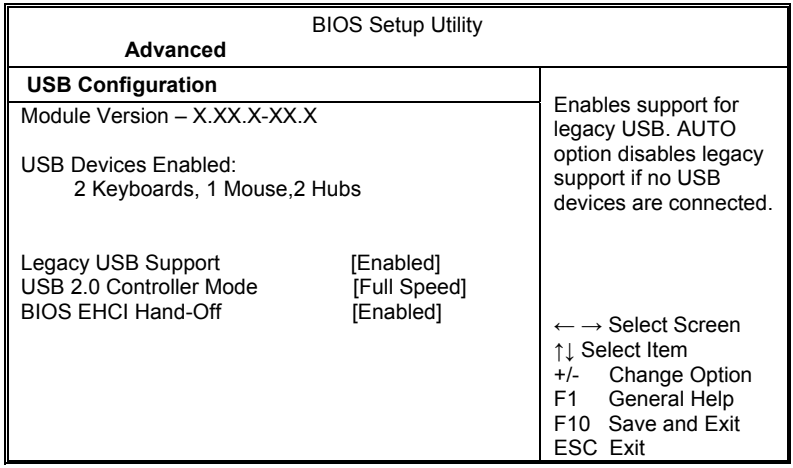
BIOS Setup Utility
Advanced
USB Configuration
Module Version – X.XX.X-XX.X
USB Devices Enabled:
2 Keyboards, 1 Mouse,2 Hubs
Legacy USB Support [Enabled]
USB 2.0 Controller Mode [Full Speed]
BIOS EHCI Hand-Off [Enabled]
Enables support for legacy USB. AUTO option disables legacy support if no USB devices are connected.
← → Select Screen
↑↓ Select Item
+/- Change Option
F1 General Help
F10 Save and Exit
ESC Exit

Feature	Option	Description
USB Configuration		
Legacy USB Support	Disabled	Enables support for legacy USB. AUTO option disables legacy support if no USB devices are connected.
	Auto	
	Enabled	
USB 2.0 Controller Mode	Hi Speed	Configure the USB 2.0 controller in Hi Speed (480Mbps) or Full Speed (12Mbps).
	Full Speed	
BIOS EHCI Hand-Off	**Enabled**	This is a work around for OSes without EHCI hand-off support. The EHCI ownership change should claim by EHCI driver.
	Disabled	

3.8 - PCI PnP Menu

You can use this screen to view PnP (Plug & Play) BIOS Configuration Menu. This menu allows the user to configure how the BIOS assigns resources & resolves conflicts. Use the up and down arrow (↑/↓) keys to select an item. Use the Plus and Minus (+/-) keys to change the value of the selected option. The settings are described on the following pages.

BIOS Setup Utility **PCI/PnP**	
Advanced PCI/PnP Settings	Clear NVRAM during System Boot.
WARING: Setting wrong values in below sections may cause system to malfunction.	
Clear NVRAM [No] Plug & Play O/S [No] PCI Latency Timer [64] Allocate IRQ to PCI VGA [Yes] Palette Snooping [Disabled] PCI IDE BusMaster [Disabled]	← → Select Screen ↑↓ Select Item +/- Change Option F1 General Help F10 Save and Exit ESC Exit

Feature	Option	Description
Advanced PCI/PnP Settings		
Clear NVRAM	**No**	Clears NVRAM during system Boot.
	Yes	
Plug & Play O/S	Yes	No: lets the BIOS configure all the devices in the system. Yes: lets the operating system configure Plug and Play (PnP) devices not required for boot if your system has a Plug and Play operating system.
	No	
PCI Latency Timer	32	This setting controls how many PCI clocks each PCI device can hold the bus before another PCI device takes over. When set to higher values, every PCI device can conduct transactions for a longer time and thus improve the effective PCI bandwidth. Values in units of PCI clocks for PCI device latency timer register.
	64	
	96	
	128	
	160	
	192	
	224	
	248	
Allocate IRQ to PCI VGA	**Yes**	Yes: assigns IRQ to PCI VGA card if card requests IRQ.
	No	

Feature	Option	Description
Palette Snooping	**Disabled**	This is the default setting and should not be changed unless the VGA card manufacturer requires Palette Snooping to be Enabled. Enabled: informs the PCI devices that an ISA graphics device is installed in the system so the card will function correctly.
	Enabled	
PCI IDE BusMaster	**Disabled**	Enabled: BIOS uses PCI bus mastering for reading / writing to IDE drives.
	Enabled	

3.9 - Boot Menu

You can display Boot Setup option by highlighting it using the Arrow (↑/↓) keys and pressing Enter. The settings are described on the following pages.

BIOS Setup Utility **Boot**	
Boot Settings	Configures settings during System Boot.
▸ Boot Settings Configuration ▸ Boot Device Priority	← → Select Screen ↑↓ Select Item Enter Go to Sub Screen F1 General Help F10 Save and Exit ESC Exit

3.9.1 - Boot Settings Configuration Sub-Menu

Use this screen to select options for the Boot Settings Configuration. Use the up and down arrow (↑/↓) keys to select an item. Use the Plus and Minus (+/-) keys to change the value of the selected option.

BIOS Setup Utility **Boot**	
Boot Settings Configuration	Allows BIOS to skip certain tests while booting. This will decrease the time needed to boot the system. ← → Select Screen ↑↓ Select Item +/- Change Option F1 General Help F10 Save and Exit ESC Exit
Quick Boot [Disabled] Quiet Boot [Disabled] AddOn ROM Display Mode [Force BIOS] Boot up Num-Lock [On] Wait for 'F1' if Error [Enabled] Hit 'DEL' Message Display [Enabled] Interrupt 19 Capture [Disabled]	

Feature	Option	Description
Boot Settings Configuration		
Quick Boot	Enabled	This option allows user bypass BIOS self test during POST.
	Disabled	
Quiet Boot	**Disabled**	Disabled: displays normal POST messages. Enabled: displays OEM log instead of POST messages.
	Enabled	
AddOn ROM Display Mode	**Force BIOS**	Allows user to force BIOS/Option ROM of add-on cards to be displayed during quiet boot.
	Keep Current	
Boot up Num-Lock	**On**	Selects Power-on state for Numlock.
	Off	
Wait for 'F1' If Error	**Enabled**	Waits for F1 key to be present if error occurs.
	Disabled	
Hit 'DEL' Message Display	**Enabled**	Displays "Press DEL to run Setup" in POST.
	Disabled	
Interrupt 19 Capture	**Disabled**	Enabled: allows option ROMs to trap interrupt 19.
	Enabled	

3.9.2 - Boot Device Priority Configuration Sub-Menu

BIOS Setup Utility **Boot**		
Boot Device Priority		Specifies the boot sequence from the available devices. A device enclosed in parenthesis has been disabled in the corresponding type menu. ← → Select Screen ↑↓ Select Item +/- Change Option F1 General Help F10 Save and Exit ESC Exit
1 st Boot Device	[Network: IBA GE Slo]	
2 nd Boot Device	[Network: IBA GE Slo]	

Feature	Option	Description
Boot Device Priority		
1 st Boot Device	**Network: IBA GE Slot 0200 v1324**	Specifies the boot sequence from the available devices. A device enclosed in parenthesis has been disabled in the corresponding type menu.
	Network: IBA GE Slot 0100 v1324	
	Disabled	
2 nd Boot Device	Network: IBA GE Slot 0200 v1324	Specifies the boot sequence from the available devices. A device enclosed in parenthesis has been disabled in the corresponding type menu.
	Network: IBA GE Slot 0100 v1324	
	Disabled	

3.10 - Security Menu

The system can be configured so that all users must enter a password every time the system boots or when BIOS Setup is entered, using either the Supervisor password or User password. The Supervisor and User passwords activate two different levels of password security. If you select password support, you are prompted for a one to six character password. Type the password on the keyboard. The password does not appear on the screen when typed. Make sure you write it down. If you forget it, you must clear CMOS and reconfigure.

BIOS Setup Utility **Security**	
Security Settings	Install or change the password.
Supervisor Password : Not Installed User Password : Not Installed Change Supervisor Password Change User Password Boot Sector Virus Protection [Disabled]	← → Select Screen ↑↓ Select Item +/- Change Option F1 General Help F10 Save and Exit ESC Exit

Feature	Option	Description
Security Settings		
Supervisor Password	**Not Installed**	If the password has been set, Installed displays. If no password is set, Not Installed displays.
	Installed	
User Password	**Not Installed**	If the password has been set, Installed displays. If no password is set, Not Installed displays.
	Installed	
Change Supervisor Password	—	Selects this option to change or install Supervisor Password.
Change User Password	—	Selects this option to change or install User Password.
Boot Sector Virus Protection	**Disabled**	When it is set to [Enabled], BIOS will issue a virus warning message and beep if a write to the boot sector or the partition table of the HDD is attempted.
	Enabled	

3.11 - Chipset Menu

This menu allows the user to customize functions of the Intel Chipsets. Select a menu by highlighting it using the Arrow (↑/↓) keys and pressing Enter. The settings are described on the following pages.

BIOS Setup Utility **Chipset**	
Advanced Chipset Settings	Configure CPU Bridge features.
WARNING: Setting wrong values in below sections may cause system to malfunction. ▸ Northbridge Configuration ▸ Southbridge Configuration	← → Select Screen ↑↓ Select Item Enter Go to Sub Screen F1 General Help F10 Save and Exit ESC Exit

3.11.1 - Northbridge Configuration Sub-Menu

This menu gives options for northbridge devices settings. Select a menu by highlighting it using the Arrow (↑/↓) keys and pressing Enter. The settings are described on the following pages.

BIOS Setup Utility **Chipset**		
North Bridge Chipset Configuration		**Options**
DRAM Frequency Configure DRAM Timing by SPD Memory Hole	[Auto] [Enabled] [Disabled]	Auto 400 MHz 533 MHz
Initate Graphic Adapter Internal Graphics Mode Select	[PCI/IGD] [Disabled]	
		← → Select Screen ↑↓ Select Item +/- Change Option F1 General Help F10 Save and Exit ESC Exit

Feature	Option	Description
North Bridge Chipset Configuration		
DRAM Frequency	Auto	\
	400 MHz	
	533 MHz	
Configure DRAM Timing by SPD	Disabled	\
	Enabled	
Memory Hole	**Disabled**	\
	15Mb~16Mb	
Initate Graphic Adapter	IGD	Select which graphics controller to use as the primary boot device.
	PCI/IGD	
Internal Graphics Mode Select	**Disabled**	Select the anount of system memory used by the Internal graphics device.
	Enabled,1Mb	
	Enabled,8Mb	

3.11.2 - Southbridge Configuration Sub-Menu

This menu gives options for southbridge devices settings. Select a menu by highlighting it using the Arrow (↑/↓) keys and pressing Enter. The settings are described on the following pages.

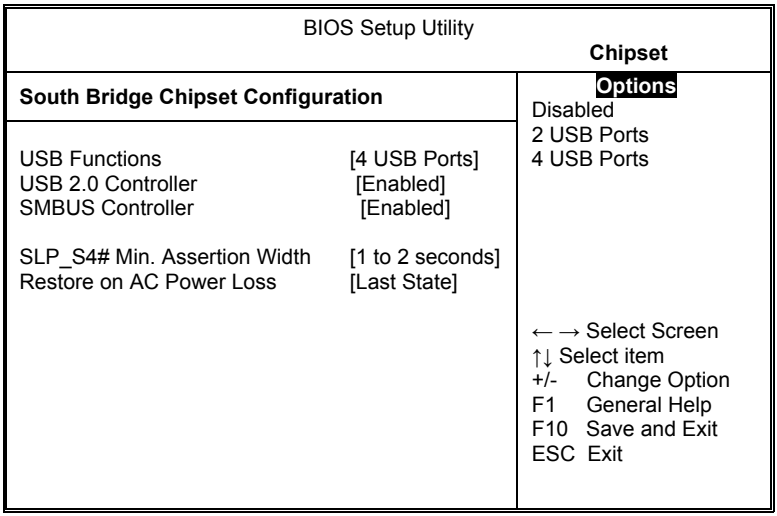

Feature	Option	Description
South Bridge Chipset Configuration		
USB Functions	Disabled	Select supported USB ports
	2 USB Ports	
	4 USB Ports	
USB 2.0 Controller	**Enabled**	Enable/Disable USB 2.0 Support
	Disabled	
SMBUS Controller	**Enabled**	Enable or disable SMBUS controller
	Disabled	
SLP_S4# Min. Assertion Width	4-5 seconds	Select Timing for SLP_S4#
	3-4 seconds	
	2-3 seconds	
	1-2 seconds	
Restore on AC Power Loss	**Power Off**	Configure how the system board responds to a power failure.
	Power On	
	Last State	

3.12 - Exit Menu

You can display an Exit BIOS Setup option by highlighting it Arrow (↑/↓) keys and pressing Enter.

BIOS Setup Utility **Exit**	
Exit Options	Exit system setup after saving the changes. F10 key can be used for this operation.
Save Changes and Exit Discard Changes and Exit Discard Charges Load Optimal Defaults Load Failsafe Defaults	← → Select Screen ↑↓ Select Item Enter Go to Sub Screen F1 General Help F10 Save and Exit ESC Exit

Save Changes and Exit
Use this option to exit setup utility and re-boot.
All new selections you have made are stored into CMOS.
System will use the new settings to boot up.

Discard Changes and Exit
Use this option to exit setup utility and re-boot.
All new selections you have made are not stored into CMOS.
System will use the old settings to boot up.

Discard Changes
Use this option to restore all new setup values that you have made but not saved into CMOS.

Load Optimal Defaults
Use this option to load default performance setup values.
Use this option when system CMOS values have been corrupted or modified incorrectly.

Load Failsafe Defaults
Use this option to load all default failsafe setup values.
Use this option when troubleshooting.

Chapter 4: Diagnostics

If you experience problems with setting up your system, always check the following things in the following order:

Memory, Video, CPU

By checking these items, you will most likely find out what the problem might have been when setting up your system. For more information on troubleshooting, check the TYAN® website at: http://www.tyan.com.

4.1 - Flash Utility

Every BIOS file is unique for the motherboard it was designed for. For Flash Utilities, BIOS downloads, and information on how to properly use the Flash Utility with your motherboard, please check the TYAN® web site:

http://www.tyan.com/

Note:

Please be aware that by flashing your BIOS, you agree that in the event of a BIOS flash failure, you must contact your dealer for a replacement BIOS. There are no exceptions. TYAN® does not have a policy for replacing BIOS chips directly with end users. In no event will TYAN® be held responsible for damages done by the end user.

4.2 - AMIBIOS Post Code

The POST code checkpoints are the largest set of checkpoints during the BIOS pre-boot process. The following table describes the type of checkpoints that may occur during the POST portion of the BIOS:

Checkpoint	Description
03	Disable NMI, Parity, video for EGA, and DMA controllers. Initialize BIOS, POST, Runtime data area. Also initialize BIOS modules on POST entry and GPNV area. Initialized CMOS as mentioned in the Kernel Variable "wCMOSFlags."
04	Check CMOS diagnostic byte to determine if battery power is OK and CMOS checksum is OK. Verify CMOS checksum manually by reading storage area. If the CMOS checksum is bad, update CMOS with power-on default values and clear passwords. Initialize status register A. Initializes data variables that are based on CMOS setup questions. Initializes both the 8259 compatible PICs in the system
05	Initializes the interrupt controlling hardware (generally PIC) and interrupt vector table.
06	Do R/W test to CH-2 count reg. Initialize CH-0 as system timer.Install the POSTINT1Ch handler. Enable IRQ-0 in PIC for system timer interrupt. Traps INT1Ch vector to "POSTINT1ChHandlerBlock."
08	Initializes the CPU. The BAT test is being done on KBC. Program the keyboard controller command byte is being done after Auto detection of KB/MS using AMI KB-5.
0A	Initializes the 8042 compatible Key Board Controller.
0B	Detects the presence of PS/2 mouse.
0C	Detects the presence of Keyboard in KBC port.
0E	Testing and initialization of different Input Devices. Also, update the Kernel Variables. Traps the INT09h vector, so that the POST INT09h handler gets control for IRQ1. Uncompress all available language, BIOS logo, and Silent logo modules.
13	Early POST initialization of chipset registers.
24	Uncompress and initialize any platform specific BIOS modules.
30	Initialize System Management Interrupt.
2A	Initializes different devices through DIM. See *DIM Code Checkpoints* section of document for more information.
2C	Initializes different devices. Detects and initializes the video adapter installed in the system that have optional ROMs.
2E	Initializes all the output devices.
31	Allocate memory for ADM module and uncompress it. Give control to ADM module for initialization. Initialize language and font modules for ADM. Activate ADM module.
33	Initializes the silent boot module. Set the window for displaying text information.
37	Displaying sign-on message, CPU information, setup key message, and any OEM specific information.
38	Initializes different devices through DIM. See *DIM Code Checkpoints* section of document for more information.

Checkpoint	Description
39	Initializes DMAC-1 & DMAC-2.
3A	Initialize RTC date/time.
3B	Test for total memory installed in the system. Also, Check for DEL or ESC keys to limit memory test. Display total memory in the system.
3C	Mid POST initialization of chipset registers.
40	Detect different devices (Parallel ports, serial ports, and coprocessor in CPU, … etc.) successfully installed in the system and update the BDA, EBDA…etc.
50	Programming the memory hole or any kind of implementation that needs an adjustment in system RAM size if needed.
52	Updates CMOS memory size from memory found in memory test. Allocates memory for Extended BIOS Data Area from base memory.
60	Initializes NUM-LOCK status and programs the KBD typematic rate.
75	Initialize Int-13 and prepare for IPL detection.
78	Initializes IPL devices controlled by BIOS and option ROMs.
7A	Initializes remaining option ROMs.
7C	Generate and write contents of ESCD in NVRam.
84	Log errors encountered during POST.
85	Display errors to the user and gets the user response for error.
87	Execute BIOS setup if needed / requested.
8C	Late POST initialization of chipset registers.
8E	Program the peripheral parameters. Enable/Disable NMI as selected
90	Late POST initialization of system management interrupt.
A0	Check boot password if installed.
A1	Clean-up work needed before booting to OS.
A2	Takes care of runtime image preparation for different BIOS modules. Fill the free area in F000h segment with 0FFh. Initializes the Microsoft IRQ Routing Table. Prepares the runtime language module. Disables the system configuration display if needed.
A4	Initialize runtime language module.
A7	Displays the system configuration screen if enabled. Initialize the CPU's before boot, which includes the programming of the MTRR's.
A8	Prepare CPU for OS boot including final MTRR values.
A9	Wait for user input at config display if needed.
AA	Uninstall POST INT1Ch vector and INT09h vector. Deinitializes the ADM module.
AB	Prepare BBS for Int 19 boot.
AC	End of POST initialization of chipset registers.
B1	Save system context for ACPI.
00	Passes control to OS Loader (typically INT19h).

Appendix: How to Make a Driver Diskette

Follow the steps below to make a driver diskette from the TYAN® driver CD provided.

1. Start the system and insert the TYAN® CD into the CD-ROM drive to boot from CD. You will see the following menu. Then press [1] and [Enter] to boot the system to TYAN® diskette maker. (If you would like to boot from hard disk, press 0 and Enter or just wait for 10 seconds to boot automatically from hard disk.).

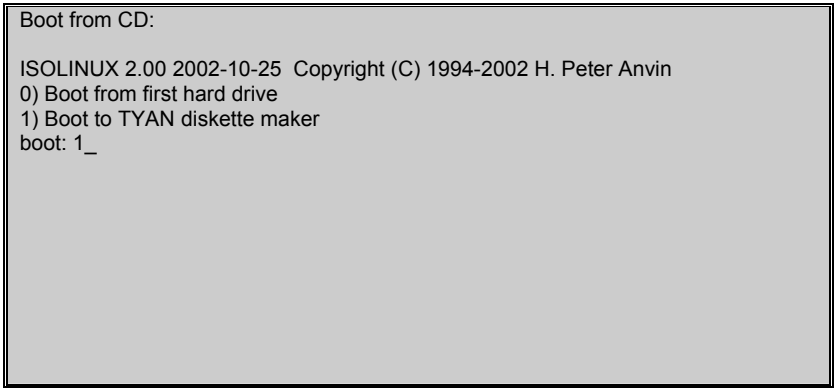
Boot from CD:
ISOLINUX 2.00 2002-10-25 Copyright (C) 1994-2002 H. Peter Anvin
0) Boot from first hard drive
1) Boot to TYAN diskette maker
boot: 1_

2. Choose the chipset vender which you need from the main menu.

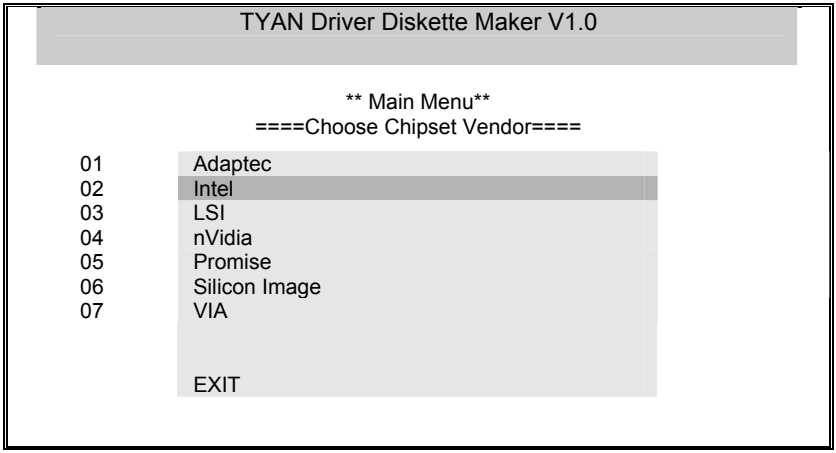

3. The following picture pops up after selecting the chipset model.

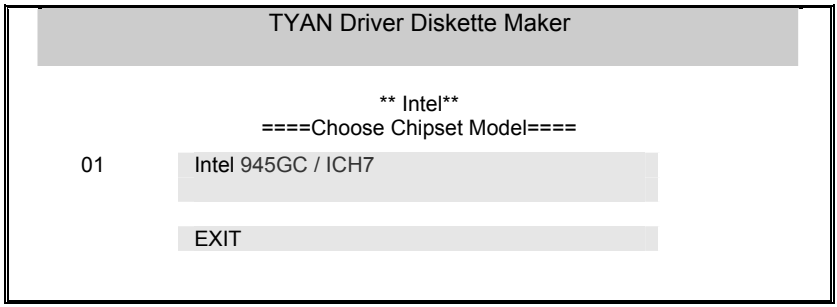

4. After selecting the chipset model, select the OS to start the diskette making.

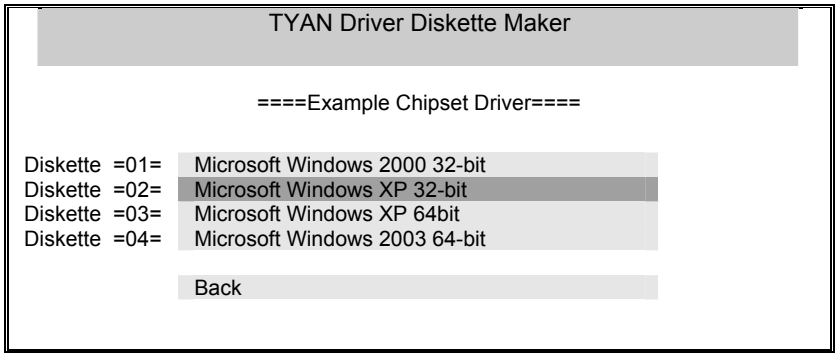
TYAN Driver Diskette Maker
====Example Chipset Driver====
Diskette =01= Microsoft Windows 2000 32-bit
Diskette =02= Microsoft Windows XP 32-bit
Diskette =03= Microsoft Windows XP 64bit
Diskette =04= Microsoft Windows 2003 64-bit
Back

5. Follow the instruction on menu to insert a diskette and press [ENTER].

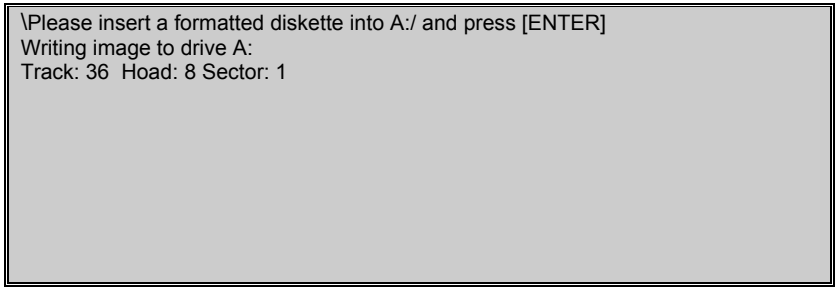

6. Using "ESC" key to quit the TYAN® diskette maker. The system will automatically restart.

Glossary

ACPI (Advanced Configuration and Power Interface): a power management specification that allows the operating system to control the amount of power distributed to the computer's devices. Devices not in use can be turned off, reducing unnecessary power expenditure.

AGP (Accelerated Graphics Port): a PCI-based interface which was designed specifically for demands of 3D graphics applications. The 32-bit AGP channel directly links the graphics controller to the main memory. While the channel runs only at 66 MHz, it supports data transmission during both the rising and falling ends of the clock cycle, yielding an effective speed of 133 MHz.

ATAPI (AT Attachment Packet Interface): also known as IDE or ATA; a drive implementation that includes the disk controller on the device itself. It allows CD-ROMs and tape drives to be configured as master or slave devices, just like HDDs.

ATX: the form factor designed to replace the AT form factor. It improves on the AT design by rotating the board 90 degrees, so that the IDE connectors are closer to the drive bays, and the CPU is closer to the power supply and cooling fan. The keyboard, mouse, USB, serial, and parallel ports are built-in.

Bandwidth: refers to carrying capacity. The greater the bandwidth, the more data the bus, phone line, or other electrical path can carry. Greater bandwidth results in greater speed.

BBS (BIOS Boot Specification): a feature within the BIOS that creates, prioritizes, and maintains a list of all Initial Program Load (IPL) devices, and then stores that list in NVRAM. IPL devices have the ability to load and execute an OS, as well as provide the ability to return to the BIOS if the OS load process fails. At that point, the next IPL device is called upon to attempt loading of the OS.

BIOS (Basic Input/Output System): the program that resides in the ROM chip, which provides the basic instructions for controlling your computer's hardware. Both the operating system and application software use BIOS routines to ensure compatibility.

Buffer: a portion of RAM which is used to temporarily store data; usually from an application though it is also used when printing and in most keyboard drivers. The CPU can manipulate data in a buffer before copying it to a disk drive. While this improves system performance (reading to or writing from a disk drive a single time is much faster than doing so repeatedly) there is the possibility of

losing your data should the system crash. Information in a buffer is temporarily stored, not permanently saved.

Bus: a data pathway. The term is used especially to refer to the connection between the processor and system memory, and between the processor and PCI or ISA local buses.

Bus mastering: allows peripheral devices and IDEs to access the system memory without going through the CPU (similar to DMA channels).

Cache: a temporary storage area for data that will be needed often by an application. Using a cache lowers data access times since the information is stored in SRAM instead of slower DRAM. Note that the cache is also much smaller than your regular memory: a typical cache size is 512KB, while you may have as much as 4GB of regular memory.

Closed and open jumpers: jumpers and jumper pins are active when they are "on" or "closed", and inactive when they are "off" or "open".

CMOS (Complementary Metal-Oxide Semiconductors): chips that hold the basic startup information for the BIOS.

COM port: another name for the serial port, which is called as such because it transmits the eight bits of a byte of data along one wire, and receives data on another single wire (that is, the data is transmitted in serial form, one bit after another). Parallel ports transmit the bits of a byte on eight different wires at the same time (that is, in parallel form, eight bits at the same time).

DDR (Double Data Rate): a technology designed to double the clock speed of the memory. It activates output on both the rising and falling edge of the system clock rather than on just the rising edge, potentially doubling output.

DIMM (Dual In-line Memory Module): faster and more capacious form of RAM than SIMMs, and do not need to be installed in pairs.

DIMM bank: sometimes called DIMM socket because the physical slot and the logical unit are the same. That is, one DIMM module fits into one DIMM socket, which is capable of acting as a memory bank.

DMA (Direct Memory Access): channels that are similar to IRQs. DMA channels allow hardware devices (like soundcards or keyboards) to access the main memory without involving the CPU. This frees up CPU resources for other tasks. As with IRQs, it is vital that you do not double up devices on a single line. Plug-n-Play devices will take care of this for you.

DRAM (Dynamic RAM): widely available, very affordable form of RAM which looses data if it is not recharged regularly (every few milliseconds). This refresh requirement makes DRAM three to ten times slower than non-recharged RAM such as SRAM.

ECC (Error Correction Code or Error Checking and Correcting): allows data to be checked for errors during run-time. Errors can subsequently be corrected at the same time that they're found.

EEPROM (Electrically Erasable Programmable ROM): also called Flash BIOS, it is a ROM chip which can, unlike normal ROM, be updated. This allows you to keep up with changes in the BIOS programs without having to buy a new chip. TYAN®'s BIOS updates can be found at www.tyan.com

ESCD (Extended System Configuration Data): a format for storing information about Plug-n-Play devices in the system BIOS. This information helps properly configure the system each time it boots.

Firmware: low-level software that controls the system hardware.

Form factor: an industry term for the size, shape, power supply type, and external connector type of the Personal Computer Board (PCB) or motherboard. The standard form factors are the AT and ATX.

Global timer: onboard hardware timer, such as the Real-Time Clock (RTC).

HDD: stands for Hard Disk Drive, a type of fixed drive.

H-SYNC: controls the horizontal synchronization/properties of the monitor.

HyperTransport™: a high speed, low latency, scalable point-to-point link for interconnecting ICs on boards. It can be significantly faster than a PCI bus for an equivalent number of pins. It provides the bandwidth and flexibility critical for today's networking and computing platforms while retaining the fundamental programming model of PCI.

IC (Integrated Circuit): the formal name for the computer chip.

IDE (Integrated Device/Drive Electronics): a simple, self-contained HDD interface. It can handle drives up to 8.4 GB in size. Almost all IDEs sold now are in fact Enhanced IDEs (EIDEs), with maximum capacity determined by the hardware controller.

IDE INT (IDE Interrupt): a hardware interrupt signal that goes to the IDE.

I/O (Input/Output): the connection between your computer and another piece of hardware (mouse, keyboard, etc.)

IRQ (Interrupt Request): an electronic request that runs from a hardware device to the CPU. The interrupt controller assigns priorities to incoming requests and delivers them to the CPU. It is important that there is only one device hooked up to each IRQ line; doubling up devices on IRQ lines can lock up your system. Plug-n-Play operating systems can take care of these details for you.

Latency: the amount of time that one part of a system spends waiting for another part to catch up. This occurs most commonly when the system sends data out to a peripheral device and has to wait for the peripheral to spread (peripherals tend to be slower than onboard system components).

NVRAM: ROM and EEPROM are both examples of Non-Volatile RAM, memory that holds its data without power. DRAM, in contrast, is volatile.

Parallel port: transmits the bits of a byte on eight different wires at the same time.

PCI (Peripheral Component Interconnect): a 32 or 64-bit local bus (data pathway) which is faster than the ISA bus. Local buses are those which operate within a single system (as opposed to a network bus, which connects multiple systems).

PCI PIO (PCI Programmable Input/Output) modes: the data transfer modes used by IDE drives. These modes use the CPU for data transfer (in contrast, DMA channels do not). PCI refers to the type of bus used by these modes to communicate with the CPU.

PCI-to-PCI Bridge: allows you to connect multiple PCI devices onto one PCI slot.

Pipeline burst SRAM: a fast secondary cache. It is used as a secondary cache because SRAM is slower than SDRAM, but usually larger. Data is cached first to the faster primary cache, and then, when the primary cache is full, to the slower secondary cache.

PnP (Plug-n-Play): a design standard that has become ascendant in the industry. Plug-n-Play devices require little set-up to use. Devices and operating systems that are not Plug-n-Play require you to reconfigure your system each time you add or change any part of your hardware.

PXE (Preboot Execution Environment): one of four components that together make up the Wired for Management 2.0 baseline specification. PXE was

designed to define a standard set of preboot protocol services within a client with the goal of allowing networked-based booting to boot using industry standard protocols.

RAID (Redundant Array of Independent Disks): a way for the same data to be stored in different places on many hard drives. By using this method, the data is stored redundantly and multiple hard drives will appear as a single drive to the operating system. RAID level 0 is known as striping, where data is striped (or overlapped) across multiple hard drives, but offers no fault-tolerance. RAID level 1 is known as mirroring, which stores the data within at least two hard drives, but does not stripe. RAID level 1 also allows for faster access time and fault-tolerance, since either hard drive can be read at the same time. RAID level 0+1 is both striping and mirroring, providing fault-tolerance, striping, and faster access all at the same time.

RAIDIOS: RAID I/O Steering (Intel)

RAM (Random Access Memory): technically refers to a type of memory where any byte can be accessed without touching the adjacent data and is often referred to the system's main memory. This memory is available to any program running on the computer.

ROM (Read-Only Memory): a storage chip which contains the BIOS; the basic instructions required to boot the computer and start up the operating system.

SDRAM (Synchronous Dynamic RAM): called as such because it can keep two sets of memory addresses open simultaneously. By transferring data alternately from one set of addresses and then the other, SDRAM cuts down on the delays associated with non-synchronous RAM, which must close one address bank before opening the next.

Serial port: called as such because it transmits the eight bits of a byte of data along one wire, and receives data on another single wire (that is, the data is transmitted in serial form, one bit after another).

SCSI Interrupt Steering Logic (SISL): Architecture that allows a RAID controller, such as AcceleRAID 150, 200 or 250, to implement RAID on a system board-embedded SCSI bus or a set of SCSI busses. SISL: SCSI Interrupt Steering Logic (LSI) (only on LSI SCSI boards)

Sleep/Suspend mode: in this mode, all devices except the CPU shut down.

SDRAM (Static RAM): unlike DRAM, this type of RAM does not need to be refreshed in order to prevent data loss. Thus, it is faster and more expensive.

SLI (Scalable Link Interface): NVIDIA SLI technology links two graphics cards together to provide scalability and increased performance. NVIDIA SLI takes advantage of the increased bandwidth of the PCI Express bus architecture, and

features hardware and software innovations within NVIDIA GPUs (graphics processing units) and NVIDIA MCPs (media and communications processors). Depending on the application, NVIDIA SLI can deliver as much as two times the performance of a single GPU configuration.

Standby mode: in this mode, the video and hard drives shut down; all other devices continue to operate normally.

UltraDMA-33/66/100: a fast version of the old DMA channel. UltraDMA is also called UltraATA. Without a proper UltraDMA controller, your system cannot take advantage of higher data transfer rates of the new UltraDMA/UltraATA hard drives.

USB (Universal Serial Bus): a versatile port. This one port type can function as a serial, parallel, mouse, keyboard or joystick port. It is fast enough to support video transfer, and is capable of supporting up to 127 daisy-chained peripheral devices.

VGA (Video Graphics Array): the PC video display standard

V-SYNC: controls the vertical scanning properties of the monitor.

ZCR (Zero Channel RAID): PCI card that allows a RAID card to use the onboard SCSI chip, thus lowering cost of RAID solution

ZIF Socket (Zero Insertion Force socket): these sockets make it possible to insert CPUs without damaging the sensitive CPU pins. The CPU is lightly placed in an open ZIF socket, and a lever is pulled down. This shifts the processor over and down, guiding it into the board and locking it into place.

Technical Support

If a problem arises with your system, you should first turn to your dealer for direct support. Your system has most likely been configured or designed by them and they should have the best idea of what hardware and software your system contains. Hence, they should be of the most assistance for you. Furthermore, if you purchased your system from a dealer near you, take the system to them directly to have it serviced instead of attempting to do so yourself (which can have expensive consequences).

If these options are not available for you then TYAN Computer Corporation can help. Besides designing innovative and quality products for over a decade, Tyan has continuously offered customers service beyond their expectations. TYAN's website (www.tyan.com) provides easy-to-access resources such as in-depth Linux Online Support sections with downloadable Linux drivers and comprehensive compatibility reports for chassis, memory and much more. With all these convenient resources just a few keystrokes away, users can easily find the latest software and operating system components to keep their systems running as powerful and productive as possible. TYAN also ranks high for its commitment to fast and friendly customer support through email. By offering plenty of options for users, TYAN serves multiple market segments with the industry's most competitive services to support them.

"TYAN's tech support is some of the most impressive we've seen, with great response time and exceptional organization in general"

- Anandtech.com

You can contact TYAN Technical Support by using our Online Support System:
http://12.230.196.231/helpstar/hsPages/login.aspx?ReturnUrl=%2fhelpstar%2fhsPages%2fDefault.aspx

Help Resources:

1. See the beep codes section of this manual.
2. See the TYAN website for FAQ's, bulletins, driver updates, and other information: http://www.tyan.com
3. Contact your dealer for help BEFORE calling TYAN.
4. Check the TYAN user group: **alt.comp.periphs.mainboard.TYAN**

Returning Merchandise for Service

During the warranty period, contact your distributor or system vendor FIRST for any product problems. This warranty only covers normal customer use and does not cover damages incurred during shipping or failure due to the alteration, misuse, abuse, or improper maintenance of products.

NOTE: A receipt or copy of your invoice marked with the date of purchase is required before any warranty service can be rendered. You may obtain service by calling the manufacturer for a Return Merchandise Authorization (RMA) number. The RMA number should be prominently displayed on the outside of the shipping carton and the package should be mailed prepaid. TYAN will pay to have the board shipped back to you

Notice for the USA
Compliance Information Statement (Declaration of Conformity Procedure) DoC
FCC Part 15: This device complies with part 15 of the FCC Rules

Operation is subject to the following conditions:
This device may not cause harmful interference, and this device must accept any interference received including interference that may cause undesired operation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try one or more of the following measures:
Reorient or relocate the receiving antenna.
Increase the separation between the equipment and the receiver.
Plug the equipment into an outlet on a circuit different from that of the receiver.
Consult the dealer on an experienced radio/television technician for help.

Notice for Canada
This apparatus complies with the Class B limits for radio interference as specified in the Canadian Department of Communications Radio Interference Regulations. (Cet appareil est conforme aux norms de Classe B d'interference radio tel que specifie par le Ministere Canadien des Communications dans les reglements d'ineteference radio.)

Notice for Europe (CE Mark)
This product is in conformity with the Council Directive 2004/108/EC, 92/31/EEC (EMC).

CAUTION: Lithium battery included with this board. Do not puncture, mutilate, or dispose of battery in fire. Danger of explosion if battery is incorrectly replaced. Replace only with the same or equivalent type recommended by manufacturer. Dispose of used battery according to manufacturer instructions and in accordance with your local regulations.

Document #: D2032 - 100